


Squeeze Type - Zinc - External Ground Lug

Images

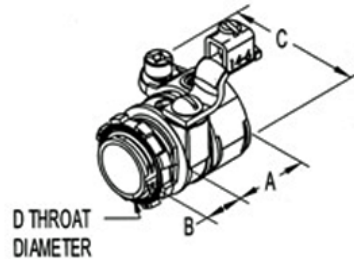

D THROAT
DIAMETER

[Download Photo Image](#)

[Download Dimensional Image](#)

Dimension A in Inches: 15/16
Dimension B in Inches: 7/16
Dimension C in Inches: 1-3/8
Dimension D in Inches: .610

Application

Used to connect and bond flexible metal conduit to box or enclosure. External lug is for inspection or redundancy of equipment bond. .86 to .92 AC/HCF Cables

Product Information

Material: Zinc Die Cast Alloy
Finish: Ball burnished for enhanced corrosion protection and shine

Certifications & Codes:

Federal Specification Number: A-A-50552
NEMA Standard: FB-1
UL File Number: c(UL)us File Number E9391
UL Standard: UL-514B
UNSPSC: 39121419
Patent Number: D666,153

Catalog ID: 407-DC2G

UPC Number: 78174717407

Description: Zinc Die Cast Alloy Squeeze connector and locknut with external copper grounding lug. For: AC/HCF/FMC

Application: Used to connect and bond flexible metal conduit to box or enclosure. External lug is for inspection or redundancy of equipment bond. .86 to .92 AC/HCF Cables

Trade Size: 1/2"

Country of Manufacture: USA

Std Pkg Qty: 200

Unit Qty: 50