

# Generator Ready Load Centers

1-Phase, 3-Wire SN, 120/240Volts AC

## Generator Ready Load Centers

The Siemens generator ready load center can save thousands of dollars in future generator installation expenses while keeping initial expenses to a minimum. Works with an automatic standby generator or a portable generator.

### Load Center Features

- UL Listed
- Indoor Type 1 and outdoor Type 3R
- 225A max rated
- Flush or surface mounting
- Fits between standard stud centers
- Tin plated copper bus bars
- 22 kAIC rated
- 120/240V ~
- Main lug – convertible to main breaker with addition of MBK150A, MBK200A, or MBK225A
- Main breaker – convertible to main lug with use of lug kit part no. ECMLK225
- Installation of transfer mechanism can be performed at time of generator installation.

### Automatic transfer switch features:

- UL Listed
- Operates automatically when connected to generator
- Transfers load from utility to generator and back to utility
- Transfer switch (sold separately)  
catalog number: GENTFRSWTCH<sup>Ⓞ</sup>

### Indoor Enclosure – NEMA Type 1

Amp Rating	No. of Spaces <sup>Ⓞ</sup>	No. of Circuits <sup>Ⓞ</sup>	Catalog Number	Dimensions (inches)		
				Height	Width	Depth
200	30	42	G3042B1200GEN	42	14.25	4
225	30	42	G3042L1225GEN	42	14.25	4
200	42	54	G4254B1200GEN	44	14.25	4
225	42	54	G4254L1225GEN	44	14.25	4

### Outdoor Enclosure – NEMA Type 3R

Amp Rating	No. of Spaces <sup>Ⓞ</sup>	No. of Circuits <sup>Ⓞ</sup>	Catalog Number	Dimensions (inches)		
				Height	Width	Depth
200	30	42	W3042B1200GEN	42	14.63	4
225	30	42	W3042L1225GEN	42	14.63	4


<sup>Ⓞ</sup> Q2125S provided with GENTFRSWTCH for use with automatic transfer mechanism.

<sup>Ⓞ</sup> 2 spaces and 2 circuits are reserved for standby generator installation.

<sup>Ⓞ</sup> Field install breaker for voltage sensing required.



NEMA 1

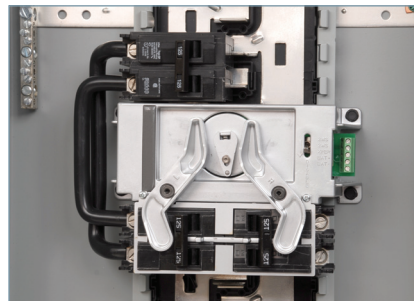

GENTFRSWTCH



NEMA 3R