



## US-30 Starter

### Starting Aid for 3-Wire HPS Ballasts

#### KEY FEATURES

- Universal 3-wire design
- Hermetically sealed components
- Durable ABS housing
- Operates with 35 to 400 watt HPS ballasts

TE Connectivity's (TE) advanced technology offers a unique starting aid for 3-wire HPS ballasts.

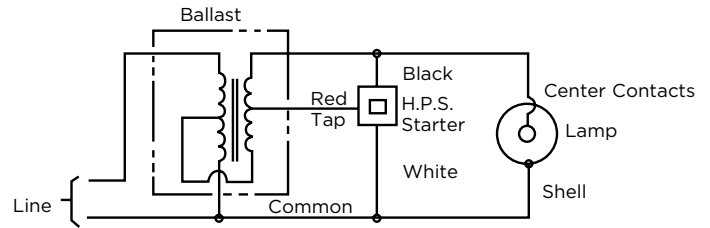
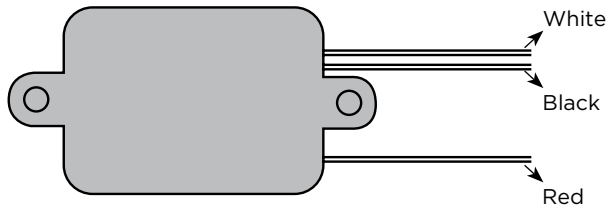
#### Innovative Long Life Design

The US-30 Starter is a universal starting aid designed to operate with most 3-wire HPS ballasts from 35 - 400 watts and with 55 - 100 volt arc tube lamps. This one starter does the jobs of dozens of different 3-wire starters.

The US-30 Starter is a state-of-the-art device that generates the spike required for lamp ignition, then discontinues the spike after lamp ignition to prevent damage to the luminaire components. The US-30's components are hermetically sealed to prevent damage from contaminants or diverse environmental conditions, and its wire leads are color coded for ease of installation and maintenance.

**Wiring Instructions**

Black - Lamp from Ballast  
 White - Common  
 Red - Starter Input to Ballast

**Specifications**

Temperature Rating	Minus 29°C to plus 90°C @ 96% RH
Housing	ABS 94 VO
Lead Wires	9", #16 AWG
Lead Wire Rating	105°C

The US-30 Starter is the result of over fifty years of experience designing and delivering superior photocontrols and other lighting accessories in the US and around the world.

**Product Selection Information**

Model	Lead Connector	Lamp Voltage	Lamp Wattage
US-30	None	50 or 1000	35 - 400

**TE Technical Support Center**

USA:	+1 (800) 327-6996
Canada:	+1 (905) 475-6222
Mexico	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

[energy.te.com](http://energy.te.com)

