


 **SEE THE DIFFERENCE**



February 2015

NEW PRODUCTS AVAILABLE

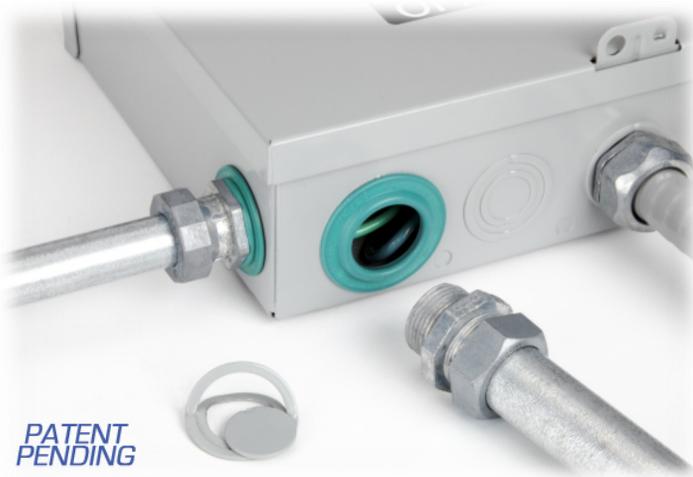

PATENT PENDING

Mighty-Seal[®] Raintight Reducing Sealing Washers

Bridgeport Fittings' Raintight Sealing Reducing washers maintain the 3R rating of any enclosure when installing raceways in oversized knockouts, or when concentric knock-out rings break out larger than expected. These items are listed for use with Bridgeport's Raintight connectors, as well as Rigid/IMC conduit.

Simply install the EPDM rubber-coated galvanized washer on the exterior of the enclosure and the non-coated washer (provided) on the interior between the fitting and the locknut, or between two locknuts when using rigid conduit.

Catalog Number	Trade Size	New Size Now Available
1061-RT	3/4" - 1/2"	
1062-RT	1" - 1/2"	
1063-RT	1" - 3/4"	
1064-RT	1-1/4" - 1/2"	<input checked="" type="checkbox"/>
1065-RT	1-1/4" - 3/4"	
1066-RT	1-1/2" - 1"	<input checked="" type="checkbox"/>
1071-RT	2" - 1/2"	
1072-RT	2" - 3/4"	<input checked="" type="checkbox"/>
1073-RT	2" - 1"	<input checked="" type="checkbox"/>
1074-RT	2" - 1-1/4"	<input checked="" type="checkbox"/>



Traditional Application which compromises the enclosure's 3R rating



Listed to UL 514B and CSA C22.2 18.3-04



CONNECT ONLINE

 Facebook.com/BridgeportFittings

 YouTube.com/BridgeportFittings

 Twitter.com/CallMightyB



Bridgeport Fittings
705 Lordship Blvd.
Stratford, CT
06615