

**SEE**  
**THE DIFFERENCE**




**BRIDGEPORT**

[www.bptfittings.com](http://www.bptfittings.com)


# BRIDGE

SEE TIME AND LABOR

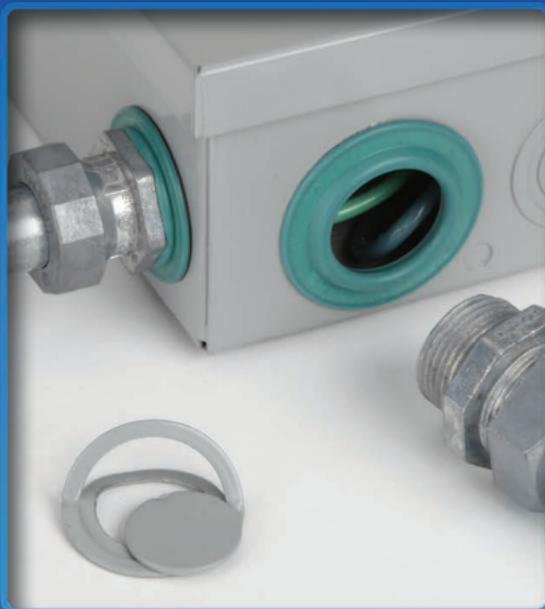

## NEED A QUICK FIX?

SEE THE MIGHTY-SEAL<sup>®</sup> RAIN-TIGHT REDUCING SEALING WASHER ON **PAGE 8**

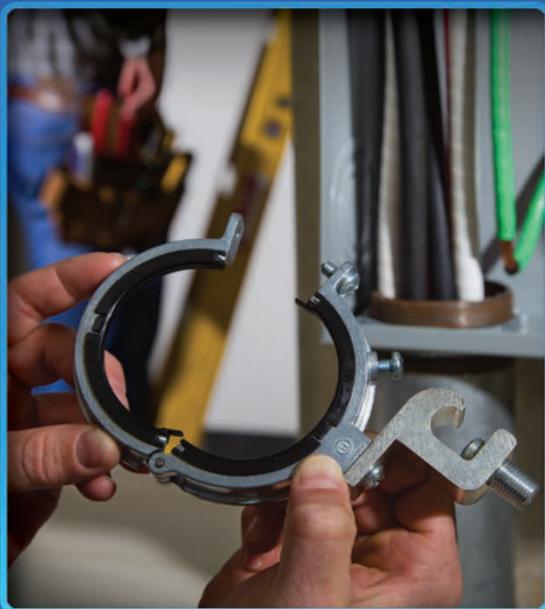

## LOOKING FOR FLEXIBLE SOLUTIONS?

SEE THE MIGHTY-RITE<sup>®</sup> SPLIT GROUNDING BUSHING ON **PAGE 4**

## HUNDREDS OF WAYS THAT DIFFERENT IS BETTER

These are just four of the hundreds of Bridgeport solutions designed specifically to help you save time and money on every job. It's what we call the Bridgeport Fittings Difference.

Ready to do more with less? Add Bridgeport innovation and get on to your next job faster.

# REPORT

## SAVINGS EVERY DAY



**WANT TO  
DO MORE  
WITH LESS?**

SEE THE  
MIGHTY-HOLD®  
UNIVERSAL  
CLAMP STRAP  
ON **PAGE 14**



**WOULD  
YOU LIKE  
TO CHANGE  
EVERYTHING?**

SEE THE  
MIGHTY-MERGE®  
TRANSITION  
COUPLING  
ON **PAGE 6**

**THE BRIDGEPORT  
FITTINGS DIFFERENCE**



TURN THE PAGE AND SEE HOW BRIDGEPORT  
CAN MAKE A DIFFERENCE FOR YOU.



**THE BRIDGEPORT  
FITTINGS DIFFERENCE**

# **MIGHTY-RITE® SPLIT GROUNDING BUSHINGS**



**SGB-387CL**



## **WHAT MAKES IT DIFFERENT?**

**SAVES TIME AND EFFORT EVERY TIME**

- Installs after wire pull
- 360° ground lug positioning
- Suitable for service entrance equipment
- UL Listed, AHJ approved
- New standard is first choice for roughing-in

**FOR MORE INFORMATION, VISIT:  
[WWW.BPTFITTINGS.COM](http://WWW.BPTFITTINGS.COM)**



## Mighty-Rite® Split Grounding Bushings

Mighty-Rite's hinged design and adjustable grounding lug deliver installation flexibility on every job. Aluminum alloy lug. Patented.

cULus File No. E20412

### Zinc Die Cast / Nylon Insulator - 150°C

Catalog Number	Grounding Lug Wire Capacity		Trade Size	Unit Qty.	Std. Pkg. Qty.
	Min. Solid Strand	Max. Solid Strand			
SGB-382CL	#14 to #4		3/4"	25	250
SGB-383CL	#14 to #4		1"	25	250
SGB-38414	#14 to #4		1 1/4"	20	200
SGB-384CL	#14 to #1/0		1 1/4"	20	200
SGB-38514	#14 to #4		1 1/2"	20	200
SGB-385CL	#14 to #1/0		1 1/2"	20	200
SGB-38614	#14 to #4		2"	10	100
SGB-386CL	#14 to #1/0		2"	10	100
SGB-38740	#6 to 250 MCM		2 1/2"	---	25
SGB-387CL	#14 to #1/0		2 1/2"	---	25
SGB-38840	#6 to 250 MCM		3"	---	25
SGB-388CL	#14 to #1/0		3"	---	25
SGB-38940	#6 to 250 MCM		3 1/2"	---	25
SGB-389CL	#6 - #3/0		3 1/2"	---	25
SGB-39040	#6 to 250 MCM		4"	---	20
SGB-390CL	#6 to #3/0		4"	---	20

**SEE**  
THE DIFFERENCE



FOR PRODUCT INFORMATION ON DEMAND  
VISIT: [YOUTUBE.COM/BRIDGEPORTFITTINGS](https://www.youtube.com/bridgeportfittings)




**THE BRIDGEPORT  
FITTINGS DIFFERENCE**

# **MIGHTY-MERGE<sup>®</sup> TRANSITION COUPLINGS**



**SKIP THE BOX**

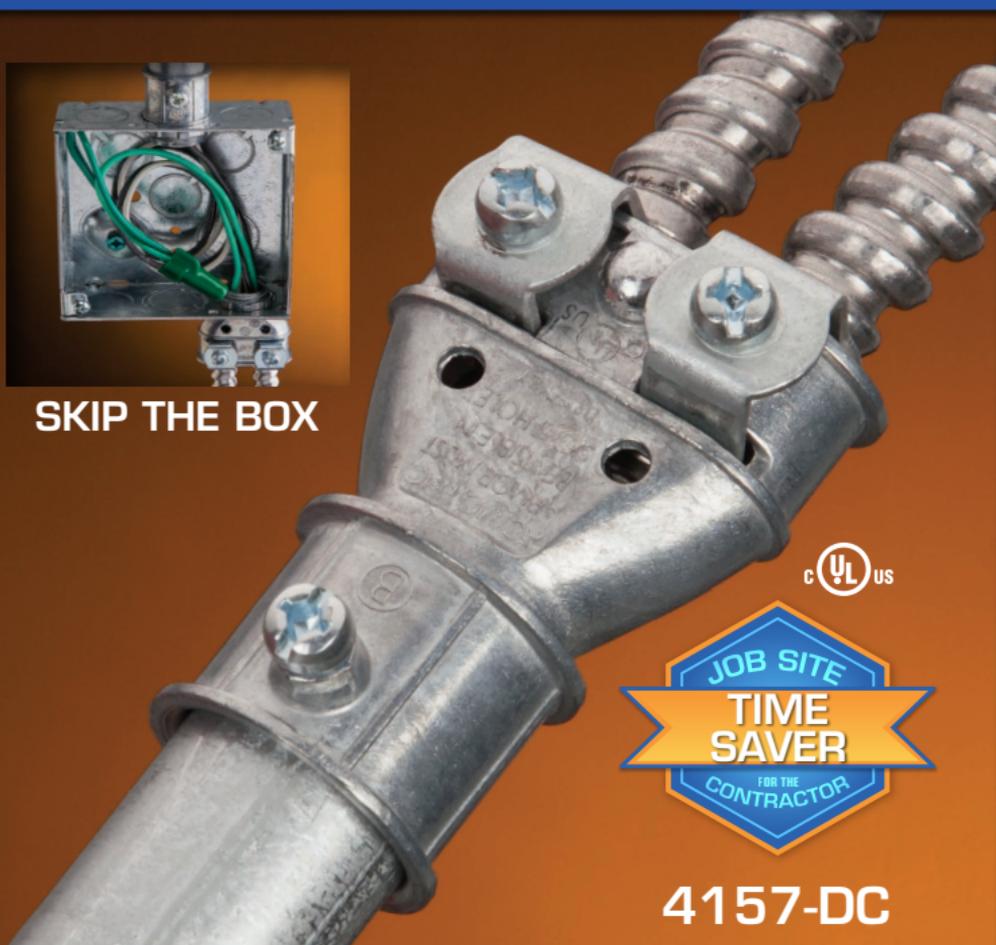

**4157-DC**

## **WHAT MAKES IT DIFFERENT?**

**STOP WASTING TIME AND SPACE**

- Installs in 1/3 time of traditional box
- 1/3 material cost
- UL Listed & meets NEC Article 300.15(F)
- Prefab alternative

FOR MORE INFORMATION, VISIT:  
**[WWW.BPTFITTINGS.COM](http://WWW.BPTFITTINGS.COM)**



## Mighty-Merge® Duplex MC to EMT Transition Coupling

Used to join duplex 14/2 (.44" Ø min) to 10/3 (.61" Ø max) armored or metal clad cable or 3/8" flexible metal conduit to 3/4" EMT. Set screw type transitional fitting ideal for commercial and institutional facilities. A labor savings, compared to the traditional junction box installation. Ensure that cables are inserted such that the cable armor is visible in the inspection holes. Patented and Patents Pending.

cULus File No. E20534

### Zinc Die Cast

Catalog Number	EMT Trade Size	Flex Trade Size	Unit Qty.	Std. Pkg. Qty.
4157-DC	3/4"	3/8"	25	100

**SEE**  
THE DIFFERENCE



FOR PRODUCT INFORMATION ON DEMAND  
VISIT: [YOUTUBE.COM/BRIDGEPORTFITTINGS](https://www.youtube.com/bridgeportfittings)



**THE BRIDGEPORT  
FITTINGS DIFFERENCE**

# **MIGHTY-SEAL<sup>®</sup>** **RAINTIGHT REDUCING SEALING WASHERS**



**1061-RT**

## **WHAT MAKES IT DIFFERENT?**

NO MORE "OOOPS" WITH THE WRONG-SIZE  
KNOCKOUT IN WET LOCATIONS

- Maintain NEMA 3R Rating & UL Listing
- No silicone required
- Saves money
- Allows easy equipment reuse

FOR MORE INFORMATION, VISIT:  
**[WWW.BPTFITTINGS.COM](http://WWW.BPTFITTINGS.COM)**



## Mighty-Seal® Raintight Reducing Sealing Washers

Used when a concentric knockout breaks out larger than expected. Maintains NEMA 3R rating on listed enclosures. Includes one coated and one uncoated washer. Coated washer installs on the exterior of the box. Sunlight resistant. Patent Pending.

cULus File No. E11259

### Coated Galvanized Steel

Catalog Number	Trade Size	Unit Qty.	Std. Pkg. Qty.
1061-RT	3/4" - 1/2"	20	200
1062-RT	1" - 1/2"	20	200
1063-RT	1" - 3/4"	20	200
1065-RT	1 1/4" - 3/4"	20	200
1071-RT	2" - 1/2"	10	100

**SEE**  
THE DIFFERENCE



FOR PRODUCT INFORMATION ON DEMAND  
VISIT: [YOUTUBE.COM/BRIDGEPORTFITTINGS](https://www.youtube.com/bridgeportfittings)



**THE BRIDGEPORT  
FITTINGS DIFFERENCE**

# **MIGHTY-SEAL<sup>®</sup> PUSH-EMT<sup>®</sup> COUPLINGS**



**260-MSRT**

## **WHAT MAKES IT DIFFERENT?**

**PUSH, PUSH AND YOU'RE DONE**

- Installs in 1/2 time
- No tools required
- Ideal for:
  - Rooftop applications
  - Parking garages
  - Stadiums
  - Go-pipe runs
- UL Listed

FOR MORE INFORMATION, VISIT:  
**[WWW.BPTFITTINGS.COM](http://WWW.BPTFITTINGS.COM)**



## Mighty-Seal® PUSH-EMT® Couplings

Connecting EMT has never been this fast and easy. Simply push the coupling onto the conduit for a raintight/wet location seal. Removable and reusable. Approximately **75% quicker** to install than conventional fittings. Patented.

cULus File No. E24001

### Zinc Die Cast

Catalog Number	Trade Size	Unit Qty.	Std. Pkg. Qty.
260-MSRT	1/2"	25	250
261-MSRT	3/4"	25	250

**SEE**  
THE DIFFERENCE




FOR PRODUCT INFORMATION ON DEMAND  
VISIT: [YOUTUBE.COM/BRIDGEPORTFITTINGS](https://www.youtube.com/bridgeportfittings)



**THE BRIDGEPORT  
FITTINGS DIFFERENCE**

# **MIGHTY-MERGE<sup>®</sup>** **RAINTIGHT EMT TO RIGID TRANSITION COUPLINGS**

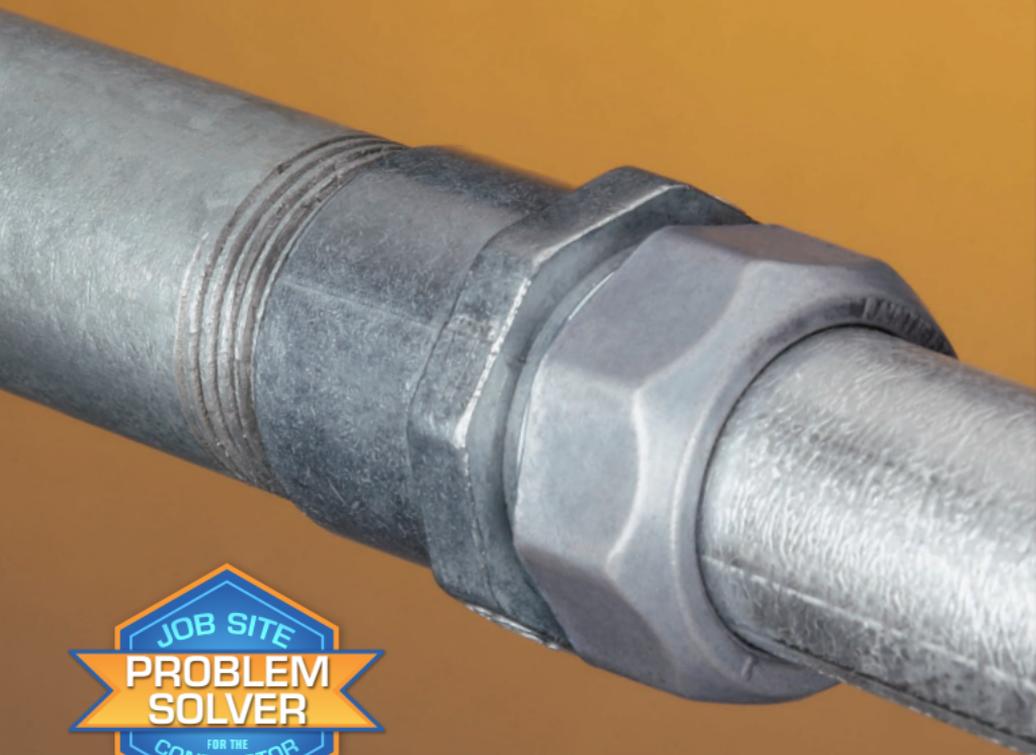

**290-RT**



## **WHAT MAKES IT DIFFERENT?**

**RAINTIGHT DONE RIGHT**

- Simplified stub-up in a wet location
- Rooftop transition solution
- Saves time & money
- ETL Listed solution

FOR MORE INFORMATION, VISIT:  
**[WWW.BPTFITTINGS.COM](http://WWW.BPTFITTINGS.COM)**



## Mighty-Merge® Raintight EMT to Rigid Transition Couplings

Couplings used to transition EMT to rigid for a secure raintight/wet location seal. Patented.

cETLus Listed

### Zinc Die Cast

Catalog Number	EMT Trade Size	Rigid Trade Size	Unit Qty.	Std. Pkg. Qty.
290-RT	1/2"	1/2"	25	100
291-RT	3/4"	3/4"	25	100
292-RT	1"	1"	10	50

**SEE**  
THE DIFFERENCE



FOR PRODUCT INFORMATION ON DEMAND  
VISIT: [YOUTUBE.COM/BRIDGEPORTFITTINGS](https://www.youtube.com/bridgeportfittings)



**THE BRIDGEPORT  
FITTINGS DIFFERENCE**

# **MIGHTY-HOLD<sup>®</sup> UNIVERSAL CLAMP STRAPS**



**UCS-5075**

**UCS-75100**



## **WHAT MAKES IT DIFFERENT?**

IT HOLDS EVERYTHING. BETTER.

- One piece clamp back & strap
- One strap secures cable or conduit – EMT, Rigid, IMC, Liquid Tight Metallic and Nonmetallic, FMC, AC/MC, and Schedule 40 and Schedule 80 PVC
- Meets Applicable NEC Requirements

FOR MORE INFORMATION, VISIT:  
**[WWW.BPTFITTINGS.COM](http://WWW.BPTFITTINGS.COM)**



## Mighty-HOLD® Universal Clamp Straps

One piece clamp back and strap secures both cable and conduit. The UCS-5075 secures 1/2" and 3/4" EMT, Rigid, IMC, Metallic Liquid Tight, Nonmetallic Liquid Tight, FMC, and Schedule 40 and Schedule 80 PVC conduit, as well as .710" Ø to 1.10" Ø steel and aluminum AC/MC cable.

The UCS-75100 secures 3/4" and 1" EMT, Rigid, IMC, Metallic Liquid Tight, Nonmetallic Liquid Tight, FMC, and Schedule 40 and Schedule 80 PVC conduit, as well as .925" Ø to 1.32" Ø steel and aluminum AC/MC cable.

cULus File No. E161206

### Zinc Plated Steel

Catalog Number	Trade Size	Unit Qty.	Std. Pkg. Qty.
UCS-5075	1/2" - 3/4"	25	100
UCS-75100	3/4" - 1"	25	100

**SEE**  
THE DIFFERENCE



FOR PRODUCT INFORMATION ON DEMAND  
VISIT: [YOUTUBE.COM/BRIDGEPORTFITTINGS](https://www.youtube.com/bridgeportfittings)



**THE BRIDGEPORT  
FITTINGS DIFFERENCE**

# **MIGHTY-BITE™ PUSH-EMT® COUPLINGS**



**260-MB**



## **WHAT MAKES IT DIFFERENT?**

ALL IT TAKES IS A PUSH.

- Installs in 1/4 time
- No tools required
- Easy removal
- Great for: stadiums, box stores, airports, schools, data centers and go-pipe runs

FOR MORE INFORMATION, VISIT:  
**[WWW.BPTFITTINGS.COM](http://WWW.BPTFITTINGS.COM)**



## Mighty-Bite™ PUSH-EMT® Couplings

Connecting EMT has never been this fast and easy. Simply push the coupling onto the conduit. Removable and reusable. Approximately 75% quicker to install than conventional fittings. Patented.

cULus File No. E24001

### Zinc Die Cast

Catalog Number	Trade Size	Unit Qty.	Std. Pkg. Qty.
260-MB	1/2"	25	250
261-MB	3/4"	25	250

**SEE**  
THE DIFFERENCE



FOR PRODUCT INFORMATION ON DEMAND  
VISIT: [YOUTUBE.COM/BRIDGEPORTFITTINGS](https://www.youtube.com/bridgeportfittings)



**THE BRIDGEPORT  
FITTINGS DIFFERENCE**

# **MIGHTY-BOND® INTERSYSTEM BONDING BRIDGE**



**IGB-050**



## **WHAT MAKES IT DIFFERENT?**

COMPLEX BECOMES EASY.

- UL Listed grounding & bonding
- Meets NEC Article 250.94
- Versatile, easy install
- Suitable for use with EMT & Rigid fittings

FOR MORE INFORMATION, VISIT:  
**[WWW.BPTFITTINGS.COM](http://WWW.BPTFITTINGS.COM)**



## Mighty-Bond® Intersystem Bonding Bridge

Intersystem Bonding Bridge used inside or outside of an enclosure or panel board. 3-Equipment bonding terminations. Meets the requirement of NEC Article 250.94. Patented.

UL File No. E20412

### Brass with Stainless Steel Hardware

Catalog Number	Trade Size	Conductor Range	Unit Qty.	Std. Pkg. Qty.
IGB-050	1/2"	#14 - 4	25	100
IGB-075	3/4"	#14 - 4	25	100

**SEE**  
THE DIFFERENCE



FOR PRODUCT INFORMATION ON DEMAND  
VISIT: [YOUTUBE.COM/BRIDGEPORTFITTINGS](https://www.youtube.com/bridgeportfittings)



**THE BRIDGEPORT  
FITTINGS DIFFERENCE**

# **MIGHTY-MERGE<sup>®</sup> TRANSITION COUPLINGS**



**4057-DC**



## **WHAT MAKES IT DIFFERENT?**

ONE FITTING DOES THE WORK OF THREE

- Installs in 1/3 time
- 1/3 material cost
- ETL Listed & meets NEC Article 300.15(F)
- Low profile – installs in confined spaces

FOR MORE INFORMATION, VISIT:  
**[WWW.BPTFITTINGS.COM](http://WWW.BPTFITTINGS.COM)**



## Mighty-Merge® Combination Couplings

Couplings used to join EMT to flexible metal conduit and AC/MC cable. The 4057-DC is also listed for MCI-A cable. Patented.

cETLus Listed

### Zinc Die Cast

Catalog Number	EMT Trade Size	FMC Trade Size	Cable Range	Unit Qty.	Std. Pkg. Qty.
4057-DC	3/4"	3/8"	1 1/2 - 10/3	25	100
4058-DC	3/4"	1/2"	10/4 - 6/4	25	100

**SEE**  
THE DIFFERENCE



FOR PRODUCT INFORMATION ON DEMAND  
VISIT: [YOUTUBE.COM/BRIDGEPORTFITTINGS](https://www.youtube.com/bridgeportfittings)



**THE BRIDGEPORT  
FITTINGS DIFFERENCE**

# **MIGHTY-SEAL<sup>®</sup>** **RAINTIGHT OFFSET NIPPLES**



**1520-RT**

## **WHAT MAKES IT DIFFERENT?**

NOW EASY TO STAY DRY.

- Only Listed wet location, offset nipple
- Maintains wet location/raintight rating
- Meets NEC Article 314.15

FOR MORE INFORMATION, VISIT:  
**[WWW.BPTFITTINGS.COM](http://WWW.BPTFITTINGS.COM)**



## Mighty-Seal® Raintight Offset Nipples

Bridgeport's raintight offset nipples are used to offset the axis of a raceway 3/4" between enclosure runs. Rugged zinc die cast construction ensures mechanical protection and durability. Integrated sealing washers maintain wet location/raintight seal.

cETLus Listed

### Zinc Die Cast

Catalog Number	Trade Size	Unit Qty.	Std. Pkg. Qty.
1520-RT	1/2"	20	200
1521-RT	3/4"	10	100
1522-RT	1"	5	50

**SEE**  
THE DIFFERENCE



FOR PRODUCT INFORMATION ON DEMAND  
VISIT: [YOUTUBE.COM/BRIDGEPORTFITTINGS](https://www.youtube.com/bridgeportfittings)



**THE BRIDGEPORT  
FITTINGS DIFFERENCE**

# **MIGHTY-BOND<sup>®</sup>** **INTERSYSTEM GROUND ROD BRIDGE CLAMP**



## **WHAT MAKES IT DIFFERENT?**

**FASTER, BETTER, COSTS LESS.**

- One item replaces three
- 2/3 cost of traditional
- Solution installs less than 1/2 time
- Direct burial rated
- Meets NEC Article 250.94

FOR MORE INFORMATION, VISIT:  
**[WWW.BPTFITTINGS.COM](http://WWW.BPTFITTINGS.COM)**



## Mighty-Bond® Intersystem Ground Rod Bridge Clamp

Intersystem Ground Rod Bridge Clamp used as an Intersystem bonding means by utilizing 4-terminal points for connecting communication systems to the same electrical grounding electrode/rod. Listed for 1/2" and 5/8" ground rods. Meets the requirement of NEC Article 250.94. Patented.

cULus File No. E20412

### Brass with Stainless Steel Hardware

Catalog Number	Trade Size	AWG Wire Capacity	Unit Qty.	Std. Pkg. Qty.
IGBC-063	1/2"	#14 - 4	25	100

**SEE**  
THE DIFFERENCE




FOR PRODUCT INFORMATION ON DEMAND  
VISIT: [YOUTUBE.COM/BRIDGEPORTFITTINGS](https://www.youtube.com/bridgeportfittings)



**THE BRIDGEPORT  
FITTINGS DIFFERENCE**

# **WHIPPER-SNAP<sup>®</sup>** **“U” SHAPED STRAP DUPLEX CONNECTORS**

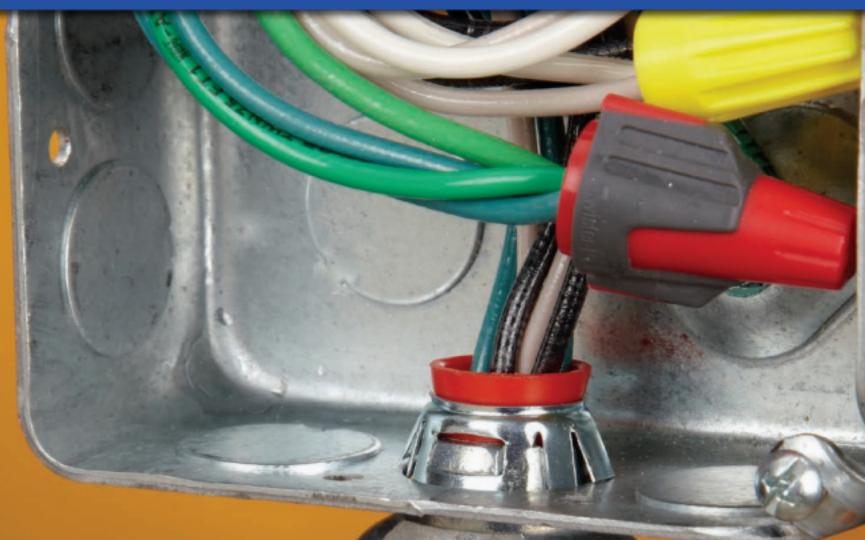

**SG3838ASP**



## **WHAT MAKES IT DIFFERENT?**

**FAST & RUGGED.**

- Installs in 1/3 time
- U-shaped straps ensure grounding continuity
- Greater pull-out protection
- Easily removable

FOR MORE INFORMATION, VISIT:  
**[WWW.BPTFITTINGS.COM](http://WWW.BPTFITTINGS.COM)**



## Whipper-Snap® Snap-In “U” Shaped Strap Duplex Connectors

For connecting 14/2 (.42" Ø min) to 10/3 (.61" Ø max) AC/MC cable or 3/8" flexible metal conduit to box or enclosure. Connectors simply snap into the electrical box. Suitable for maintaining grounding continuity when installed in accordance with the NEC. Patented Whipper-Snap design.

cULus File No. E20534

### Zinc Die Cast / Insulated Throat - 105°C

Catalog Number	Trade Size	K.O. Size	Unit Qty.	Std. Pkg. Qty.
SG3838ASP	3/8"	1/2"	20	200

**SEE**  
THE DIFFERENCE



FOR PRODUCT INFORMATION ON DEMAND  
VISIT: [YOUTUBE.COM/BRIDGEPORTFITTINGS](https://www.youtube.com/bridgeportfittings)



**THE BRIDGEPORT  
FITTINGS DIFFERENCE**

# **MIGHTY-ALIGN<sup>®</sup>** **SELF-ALIGNING, RAINTIGHT** **3-PIECE CONDUIT COUPLINGS**



**1121-RT**



## **WHAT MAKES IT DIFFERENT?**

LINES ITSELF UP FOR SUCCESS.

- Self-aligning for easier installation
- Maintains wet-location compliance per NEC Article 314.15
- Smooth interior throat allows easy wire pull
- Durable malleable iron body with internal sealing o-ring
- Patented

FOR MORE INFORMATION, VISIT:  
**[WWW.BPTFITTINGS.COM](http://WWW.BPTFITTINGS.COM)**



## Mighty-Align® Self-Aligning, Raintight, Three-Piece Conduit Couplings

Used to join two lengths of threaded rigid and IMC conduit. Mighty-Align delivers a solid connection with its quick, auto-aligning raintight design. Patented.

cULus File No. E9391

### Malleable Iron

Catalog Number	Trade Size	Unit Qty.	Std. Pkg. Qty.
1121-RT	1/2"	25	100
1122-RT	3/4"	10	100
1123-RT	1"	5	50
1124-RT	1 1/4"	—	25
1125-RT	1 1/2"	—	20
1126-RT	2"	---	10
1127-RT	2 1/2"	---	5
1128-RT	3"	---	5
1129-RT	3 1/2"	---	4
1130-RT	4"	---	5

**SEE**  
THE DIFFERENCE



FOR PRODUCT INFORMATION ON DEMAND  
VISIT: [YOUTUBE.COM/BRIDGEPORTFITTINGS](https://www.youtube.com/bridgeportfittings)



**THE BRIDGEPORT  
FITTINGS DIFFERENCE**

# **MIGHTY-MOVE® STEEL EXPANSION COUPLINGS**



**EC-075R**



## **WHAT MAKES IT DIFFERENT?**

INSTALLED SAVINGS EXPANDS YOUR PROFIT.

- Least expensive dry-location expansion coupling available
- Suitable for Rigid & IMC conduit
- Zinc-plated steel
- Patented

FOR MORE INFORMATION, VISIT:  
**[WWW.BPTFITTINGS.COM](http://WWW.BPTFITTINGS.COM)**



## Mighty-Move® Steel Expansion Couplings

Assembles like a regular Rigid/IMC set screw coupling. To install, simply slide coupling end stop onto fixed end of conduit and tighten set screw. Place movable conduit end completely into coupling and mark engagement, remove conduit and mark half the distance of engagement, reinstall conduit to half the distance. Bonding jumper purchased separately. Patented.

cULus File No. E9391

### Zinc Plated Steel

Catalog Number	Trade Size	Unit Qty.	Std. Pkg. Qty.
EC-075R	3/4"	15	60
EC-100R	1"	10	40
EC-125R	1-1/4"	8	40
EC-150R	1-1/2"	6	30
EC-200R	2"	---	4
EC-250*	2-1/2"	---	1
EC-300*	3"	---	1
EC-350*	3-1/2"	---	1
EC-400*	4"	---	1

\*2 1/2" thru 4" suitable for use with EMT or Rigid/IMC conduit.

**SEE**  
THE DIFFERENCE



FOR PRODUCT INFORMATION ON DEMAND  
VISIT: [YOUTUBE.COM/BRIDGEPORTFITTINGS](https://www.youtube.com/bridgeportfittings)

# THE BRIDGEPORT FITTINGS DIFFERENCE



Bridgeport Fittings, Inc.  
705 Lordship Blvd.  
Stratford, CT 06615-7313

Voice: 203.377.5944  
Fax: 203.381.3488  
E-mail: [sales@bptfittings.com](mailto:sales@bptfittings.com)

[www.bptfittings.com](http://www.bptfittings.com)

**CONNECT  
ONLINE**



[facebook.com/BridgeportFittings](https://facebook.com/BridgeportFittings)



[youtube.com/BridgeportFittings](https://youtube.com/BridgeportFittings)



[twitter.com/CallMightyB](https://twitter.com/CallMightyB)