


## Connector Type

### Images

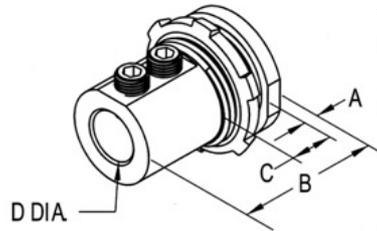

### Application

Used to bond boxes, devices, enclosures with a minimum wall thickness of 0.1 inches - max 0.385 inches. Designed for use with a continuous length of equipment grounding conductor when inserted in 1" trade size knockout.

### Product Information

Material: Brass

### Certifications & Codes:

NEMA Standard: FB-1  
UL File Number: E20412  
UL Standard: UL467  
UNSPSC: 3912163  
Patent Number: D651,569; 7,901,256

[Download Photo Image](#)

[Download Dimensional Image](#)

Dimension A in Inches: .19  
Dimension B in Inches: 1.88  
Dimension C in Inches: .56  
Dimension D in Inches: .62

**Catalog ID:** MC-100

**UPC Number:** 78174702352

**Description:** Mighty-Bond® 1" Brass Equipment Bonding Connector

**Application:** Used to bond boxes, devices, enclosures with a minimum wall thickness of 0.1 inches - max 0.385 inches. Designed for use with a continuous length of equipment grounding conductor when inserted in 1" trade size knockout.

**Trade Size:** 1"

**Std Pkg Qty:** 40

**Unit Qty:** 10