


Coupling Type

Images

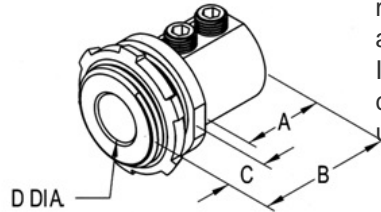

Application

Used for bonding boxes, devices and enclosures with a minimum wall thickness of 0.1 inches max 0.385 inches to a continuous length of equipment grounding conductor. Installs in a 1" trade size K.O. and can be installed connected to a raceway provided the locknut is still utilized.

Product Information

[Download Photo Image](#)

[Download Dimensional Image](#)

Material: Brass

Dimension A in Inches: 1.13
Dimension B in Inches: 1.88
Dimension C in Inches: .56
Dimension D in Inches: .62

Certifications & Codes:

NEMA Standard: FB-1
UL File Number: E20412
UL Standard: UL467
UNSPSC: 39121613
Patent Number: 7,927,157; D657,316

Catalog ID: MCC-100

UPC Number: 78174702342

Description: Mighty-Bond 1" Brass Equipment Bonding Connector/Coupling

Application: Used for bonding boxes, devices and enclosures with a minimum wall thickness of 0.1 inches max 0.385 inches to a continuous length of equipment grounding conductor. Installs in a 1" trade size K.O. and can be installed connected to a raceway provided the locknut is still utilized.

Trade Size: 1"

Std Pkg Qty: 40

Unit Qty: 10