


Grounding - Steel

Images

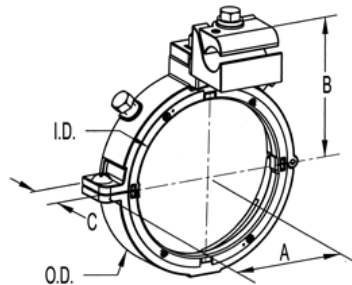

Application

Used in situations where wires have already been pulled through Rigid/IMC conduit, and an insulated bushing is required. 350 MCM - 500 MCM Aluminum Grounding lug. Rated 150 Degree C. Good for Utilities and Large Electrical Service Conduits, especially where a full size grounding wire is required.

Product Information

Material: Steel
Finish: Zinc Plated, Grounding Lug, Tin Electro-Plate

Certifications & Codes:

Federal Specification Number: A-A-50553
NEMA Standard: FB-1
UL File Number: E20412
UL Standard: UL-514B
UNSPSC: 39121312

[Download Photo Image](#)

[Download Dimensional Image](#)

Dimension A in Inches: 2.99
Dimension B in Inches: 4.60
Dimension C in Inches: 0.73
Dimension D in Inches: 5.00 O.D.
Dimension E in Inches: 3.87 I.D.

Catalog ID: SGBS-39050

UPC Number: 78174723906

Description: Split Bushing, Insulated, Grounding, Steel, Size 4 Inch, 350-500 MCM Lug

Application: Used in situations where wires have already been pulled through Rigid/IMC conduit, and an insulated bushing is required. 350 MCM - 500 MCM Aluminum Grounding lug. Rated 150 Degree C. Good for Utilities and Large Electrical Service Conduits, especially where a full size grounding wire is required.

Trade Size: 4"

Std Pkg Qty: 10

Unit Qty: -