


## Grounding - Steel

### Images

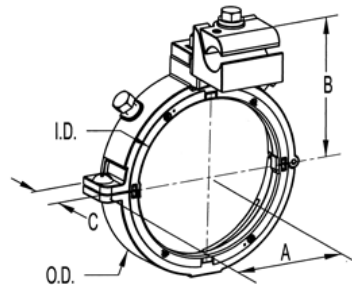

### Application

Used in situations where wires have already been pulled through Rigid/IMC conduit, and an insulated bushing is required. 350 MCM - 500 MCM Aluminum Grounding lug. Rated 150 Degree C. Good for Utilities and Large Electrical Service Conduits, especially where a full size grounding wire is required.

### Product Information

Material: Steel  
Finish: Zinc Plated, Grounding Lug, Tin Electro-Plate

### Certifications & Codes:

Federal Specification Number: A-A-50553  
NEMA Standard: FB-1  
UL File Number: E20412  
UL Standard: UL-514B  
UNSPSC: 39121312

[Download Photo Image](#)

[Download Dimensional Image](#)

Dimension A in Inches: 4.18  
Dimension B in Inches: 5.61  
Dimension C in Inches: 1.13  
Dimension D in Inches: 7.15 O.D.  
Dimension E in Inches: 5.85 I.D.

**Catalog ID:** SGBS-39250

**UPC Number:** 78174723926

**Description:** Split Bushing, Insulated, Grounding, Steel, Size 6 Inch, 350-500 MCM Lug

**Application:** Used in situations where wires have already been pulled through Rigid/IMC conduit, and an insulated bushing is required. 350 MCM - 500 MCM Aluminum Grounding lug. Rated 150 Degree C. Good for Utilities and Large Electrical Service Conduits, especially where a full size grounding wire is required.

**Trade Size:** 6"

**Std Pkg Qty:** 10

**Unit Qty:** -