



# Revisions

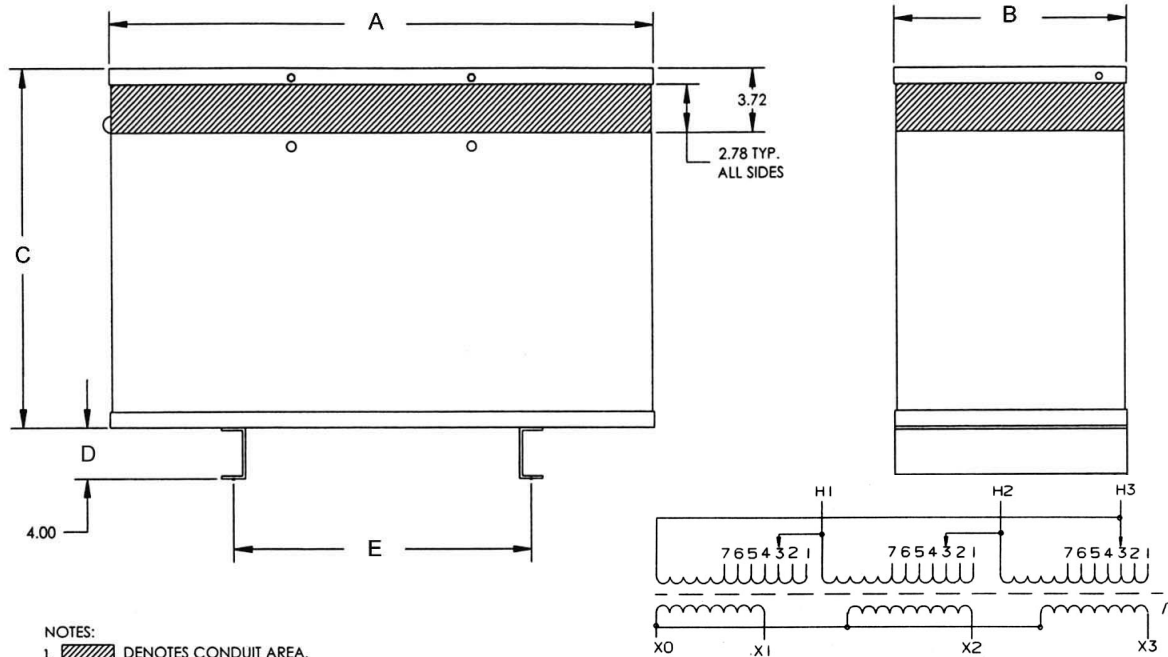

NOTES:  
1. DENOTES CONDUIT AREA.

PRIMARY VOLTS	%	CONNECT LEADS TO TAP NO.
504	105	1
492	102.5	2
480	100	3
468	97.5	4
456	95	5
444	92.5	6
432	90	7



PRIMARY LINES TO H1-H2-H3  
SECONDARY LINES TO X0-X1-X2-X3

KVA	CATALOG NUMBER	VOLTAGE		Enclosure	WEIGHT	PHASE	FREQ.
		HIGH	LOW				
15	<b>T-3-3500015-3S</b>	480Δ	480Y/277	NEMA-3R	250 Lbs	3φ	60 Hz
	A	B	C	D	E	F	
(In.)	20.30	9.03	14.86	4.00	13.25	7.00	
ENCAPSULATED		WINDINGS (AL)	SOUND LEVEL: 45 dB	INSULATION 185°C		TEMP. RISE 115°C	



## CD SHEET

Type No.	
DRAWN: ADR	
DESIGN	
CHK.	APP.
MAT'L	
FINISH	
SCALE	SHEET