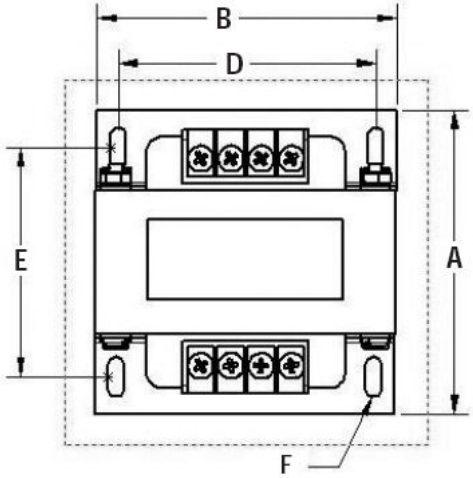

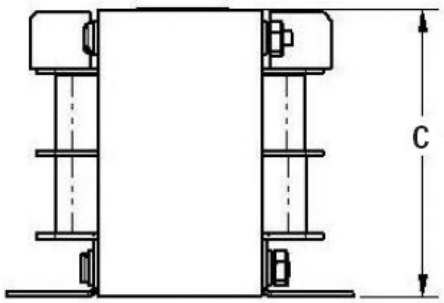

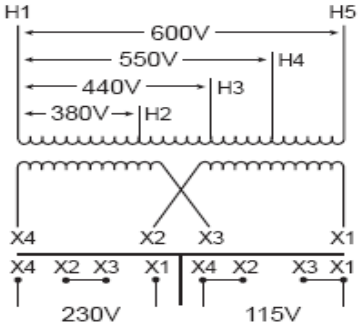

VA	CATALOG NUMBER	VOLTAGE		WIRING DIAGRAM	WEIGHT	PHASE	FREQ.
		HIGH	LOW				
500	**TA-2-54539**	380/440/550/600	115/230		23 Lbs	1ϕ	50/60 Hz

TYPICAL PERFORMANCE DATA

Winding Rise:	80°C
Insulation:	130°C
Windings:	CU

Standards:	UL/CSA

Markings:	

Typical Efficiency:	
Full Load Losses	
No Load Losses	

Industrial Control Transformer

A	B	C	D	E	F				
6.76	4.88	4.15	4.06	5.75	.22 x .50				

					A	PRINTS TO	CONTROL 7

Revisions

ACME ELECTRIC

Type No.

Date: May 21, 2010