

UTILITY LIGHTING


CEILING MOUNT LIGHT FIXTURES

- Medium-Base, UL Listed. File #: E182610. Suitable for use in damp locations.
- Meets the requirements of the 2011 National Electrical Code: Articles 314.16(A)(2), 314.17(C), 410.10(A) and 547.5(C)(1) and (2).
- High impact, corrosion resistant, compression molded phenolic junction box and fixture base.
- Glass and Tempered Glass Globes rated for 150-watt Incandescent Lamp (maximum), medium-base Compact Fluorescent or LED Lamps.
- Polycarbonate and Arylic Prismatic Globes rated for 60-watt Incandescent Lamp (maximum), medium-base Compact Fluorescent or LED Lamps.
- All Ceiling Mount Fixtures are supplied with a cork mounting gasket and stainless steel screws. Wired with 150°C (302°F) minimum supply wires (THHN).



TYPICAL APPLICATIONS:

- Walk-in Refrigerators
- Elevator Shafts
- Tunnels
- Storage Buildings
- Maintenance Areas
- Hog and Poultry Confinement Buildings

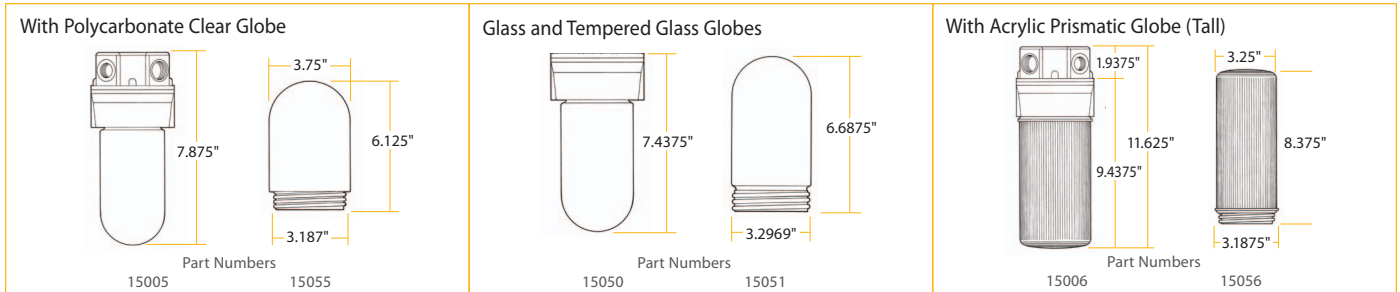

Fixture Globe and Junction Box Dimensional Reference

Catalog Number	UPC Number	Description	Order Unit	Order Qty	Unit Pkg	Units/Case	TL Case Qty	Min Order Qty	MM Req	Ship Wt (Lbs)
With 12 Cubic Inch Junction Box (15045)										
15000	15000	Utility Light: 1/2" & 3/4" Knockout Combo - Glass Globe	EA	1	BX	12	12	12	Yes	24
15001	15001	Utility Light: 1/2" & 3/4" Knockout Combo - Tempered Glass Globe	EA	1	BX	12	12	12	Yes	24
15002	15002	Utility Light: 3/4" Knockout - Glass Globe	EA	1	BX	12	12	12	Yes	24
15005	15005	Utility Light: 1/2" & 3/4" Knockout Combo - Polycarbonate Globe	EA	1	BX	12	12	1	No	18
15006	15006	Utility Light: 1/2" & 3/4" Knockout Combo - Acrylic Prismatic Globe (Tall)	EA	1	BX	12	12	1	No	19
15007	15007	Utility Light: 1/2" & 3/4" Knockout Combo - Acrylic Prismatic Globe	EA	1	BX	12	12	1	No	19
Without Junction Box										
15050	15050	Utility Light: Standard Glass Globe	EA	1	BX	12	12	12	Yes	20
15051	15051	Utility Light: Tempered Glass Globe	EA	1	BX	12	12	12	Yes	20
15055	15055	Utility Light: Polycarbonate Clear Globe	EA	1	BX	12	12	1	No	14
15056	15056	Utility Lights: Acrylic Prismatic Globe (Tall)	EA	1	BX	12	12	1	No	15
15090	15090	Edison-Type Fixture Base: Globe not included	EA	1	BX	12	12	1	No	not included

UNITS OF MEASURE KEY


Order Unit: The Unit to be ordered; Order Qty: Number of pieces in each Unit; Unit Pkg: Packaging types - BG (Bag), BX (Box), BN (Bulk); Units/Case: Unit packages contained in the Case; TL Case Qty: The total number of items in each Master Case; Min Order Qty: The smallest Unit that can be ordered; MM Req: Must order multiples of the Unit in the stated quantities; Ship Wt (Lbs): Total weight of the units per Carton

Specifications subject to change without prior notice.

UTILITY LIGHTING

STANDARD NON-METALLIC JUNCTION BOXES

- High impact, compression molded phenolic plastic rated to 150°C (302°F).
- Meets the requirements of the 2011 National Electrical Code: Articles 314.15, 314.16(A)(2), 314.17(C), and 547.5(C)(1) and (2).
- Suitable for use in “wet or damp” locations.
- Corrosion resistant.
- UL Listed. File Number: E182992.



Catalog Number	UPC Number	Description	Order Unit	Order Qty	Unit Pkg	Units/Case	TL Case Qty	Min Order Qty	MM Req	Ship Wt (Lbs)
15045	15045	12 Cubic Inch Junction Box: 1/2" and 3/4" Knockout Combo	EA	12	BX	0	0	12	Yes	6
15046	15046	12 Cubic Inch Junction Box: 1/2" Knockouts	EA	12	BX	0	0	12	Yes	6
15047	15047	12 Cubic Inch Junction Box: 3/4" Knockouts	EA	12	BX	0	0	12	Yes	6
15049	15049	19 Cubic Inch Junction Box: 3/4" Knockouts	EA	12	BX	0	0	12	Yes	6
15070	15070	16 Cubic Inch Single-Gang FS Type Junction Box: 1/2" Knockouts	EA	12	BX	0	0	12	Yes	6
15071	15071	16 Cubic Inch Single-Gang FS Type Junction Box: 3/4" Knockouts	EA	12	BX	0	0	12	Yes	6
15075	15075	Single-Gang Junction Box Cover and Gasket	EA	12	BX	0	0	12	Yes	2
15690	15690	Universal Mounting Bracket	EA	1	BG	0	0	1	No	6
15905	15905	Round Junction Box Cover and Gasket	EA	12	BX	0	0	12	Yes	2

SPIDERBOX™ NON-METALLIC JUNCTION BOXES

- Suitable for use in “wet or damp” locations.
- Corrosion resistant.
- Easy to install using the eight (8) mounting brackets that are in-line with knockouts.
- Eliminates a 2 x 4 stub-in.
- High impact compression molded phenolic plastic rated to 150°C (302°F).
- Meets the requirements of the 2011 National Electrical Code: Articles 314.15, 314.16(A)(2), 314.17(C), 547.5(C)(1) and (2).
- UL Listed. File Number: E182992.



COMPACT FLOURESCENT LAMPS



Catalog Number	UPC Number	Description	Order Unit	Order Qty	Unit Pkg	Units/Case	TL Case Qty	Min Order Qty	MM Req	Ship Wt (Lbs)
SPIDERBOX Non-Metallic Junction Boxes										
15246	15246	12 Cubic Inch SPIDERBOX Junction Box: 1/2" Knockouts	EA	12	BX	0	0	12	Yes	6
15247	15247	12 Cubic Inch SPIDERBOX Junction Box: 3/4" Knockouts	EA	12	BX	0	0	12	Yes	6
15905	15905	Round Junction Box Cover and Gasket	EA	12	BX	0	0	12	Yes	2
Compact Fluorescent Lamps										
15670	15670	Compact Fluorescent Lamp: 23-Watt, GU24 Bi-Pin Self-Ballasted Lamp (5,000K)	EA	1	BX	50	50	1	No	8
15680	15680	Compact Fluorescent Lamp: 23-Watt Self-Ballasted Lamp (5,000K) (Light output is equal to a 90-watt Incandescent Lamp)	EA	1	BX	50	50	1	No	8

UNITS OF MEASURE KEY


Order Unit: The Unit to be ordered; Order Qty: Number of pieces in each Unit; Unit Pkg: Packaging types - BG (Bag), BX (Box), BN (Bulk); Units/Case: Unit packages contained in the Case; TL Case Qty: The total number of items in each Master Case; Min Order Qty: The smallest Unit that can be ordered; MM Req: Must order multiples of the Unit in the stated quantities; Ship Wt (Lbs): Total weight of the units per Carton

Specifications subject to change without prior notice.

FIXTURE GLOBES

Glass and Tempered Glass Globes

- Withstands extreme temperature changes.
- Rated for use with a 150-watt Incandescent Lamp (maximum), medium-base Compact Fluorescent or LED Lamps.

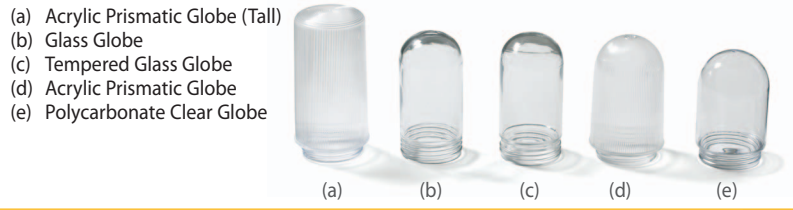

Acrylic Prismatic and Polycarbonate Globes

- UV stabilized material. The Acrylic Prismatic Globes resist discoloration four times longer than polycarbonate.
- 3 Year guarantee against discoloration from UV exposure. For applications that require high-pressure washdown.
- Acrylic Prismatic Globes feature internal ribbing and smooth exterior.
- Rated for use with a 60-watt Incandescent Lamp (maximum), medium-base Compact Fluorescent or LED Lamps.

Catalog Number	UPC Number	Description	Order Unit	Order Qty	Unit Pkg	Units/Case	TL Case Qty	Min Order Qty	MM Req	Ship Wt (Lbs)
15015	15015	Glass Globe	EA	32	BX	0	0	32	Yes	34
15016	15016	Tempered Glass Globe	EA	32	BX	0	0	32	Yes	34
15020	15020	Polycarbonate Clear Globe	EA	12	BX	12	0	12	No	5
15025	15025	Acrylic Prismatic Globe (Tall)	EA	12	BX	12	0	12	No	5
15401	15401	Acrylic Prismatic Globe	EA	12	BX	12	0	12	No	5

Note: Fixture Globes are sold ONLY in case quantities.

NON-METALLIC UF CONNECTORS

- Compression type specifically designed for use with 14/2 or 12/2 AWG Romex® cable.
- Low profile design to fit the new smaller UF Cables as well as standard sizes.



Catalog Number	UPC Number	Description	Order Unit	Order Qty	Unit Pkg	Units/Case	TL Case Qty	Min Order Qty	MM Req	Ship Wt (Lbs)
15035	15035	Non-Metallic UF Connector – 1/2": Accommodates 14/2 and 12/2 Romex Cable and EPCO SPT 16/3 Flat Power/Appliance Cords	EA	12	BG	0	0	12	Yes	1
15040	15040	Non-Metallic UF Connector – 3/4": Accommodates 14/3 and 10/2 Romex Cable and EPCO SPT 16/3 Flat Power/Appliance Cords	EA	12	BG	0	0	12	Yes	1

REPLACEMENT LAMP SOCKET

- High temperature porcelain lamp socket with 6-inch 18 AWG stranded wire leads.
- Includes corrosion resistant nickel-plated brass screw shell.
- Can be used with 150-watt Incandescent Lamp (maximum), medium-base Compact Fluorescent or LED Lamps.



Catalog Number	UPC Number	Description	Order Unit	Order Qty	Unit Pkg	Units/Case	TL Case Qty	Min Order Qty	MM Req	Ship Wt (Lbs)
15031	15031	Replacement Lamp Socket: Porcelain	EA	12	BG	0	0	12	Yes	1

Note: Porcelain lamp sockets are not interchangeable with light fixtures built with phenolic sockets.

UNITS OF MEASURE KEY

Order Unit: The Unit to be ordered; Order Qty: Number of pieces in each Unit; Unit Pkg: Packaging types - BG (Bag), BX (Box), BN (Bulk); Units/Case: Unit packages contained in the Case; TL Case Qty: The total number of items in each Master Case; Min Order Qty: The smallest Unit that can be ordered; MM Req: Must order multiples of the Unit in the stated quantities; Ship Wt (Lbs): Total weight of the units per Carton

Specifications subject to change without prior notice.

UTILITY LIGHTING

WIRE GUARD

- Fits Glass, Tempered Glass and Acrylic Prismatic (short) Globes only.
- 8 AWG steel, with a three-coat electrolytic plating.
- Clamp-type attachment.





Catalog Number	UPC Number	Description	Order Unit	Order Qty	Unit Pkg	Units/ Case	TL Case Qty	Min Order Qty	MM Req	Ship Wt (Lbs)
15063	15063	Wire Guard	EA	1	BX	0	0	1	No	2

WALL MOUNT LIGHT FIXTURES

- UL Listed. Suitable for use in damp locations. File Number: E182610, Volume 2.
- Meets the requirements of the 2011 National Electrical Code: Articles 314.16(A)(2), 314.17(C), 410.10(A) and 547.5(C)(1) and (2).
- Can be used with Incandescent Lamps rated up to 150-watts.*
- Globe options: Glass, Tempered Glass or Acrylic Prismatic.
- High impact, corrosion resistant construction.
- Medium-Base – fits 3.25" or 4.0" Junction Box.**
- Low cost alternative to Vapor Tight Light Fixtures.
- Nickel-plated Brass Screw Shell.
- UV resistant – will not fade or discolor.

* When used with Glass or Tempered Glass Globes.
 ** Use the optional universal mounting bracket (P/N: 15690) for residential junction box applications.

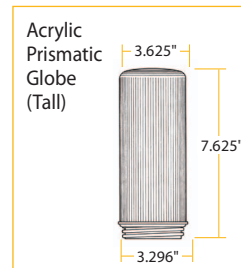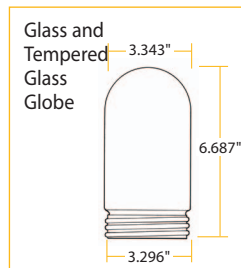

Catalog Number	UPC Number	Description	Order Unit	Order Qty	Unit Pkg	Units/ Case	TL Case Qty	Min Order Qty	MM Req	Ship Wt (Lbs)
Wall Mount Utility Light Fixtures										
15600	15600	Utility Light: Tempered Glass Globe - Black	EA	1	BX	12	12	1	No	22
15605	15605	Utility Light: Tempered Glass Globe; 12 Cubic Inch Junction Box with Combination 1/2" and 3/4" Knockouts - Black	EA	1	BX	12	12	1	No	28
15610	15610	Utility Light: Acrylic Prismatic Globe (Tall) - Black	EA	1	BX	12	12	1	No	16
15615	15615	Utility Light: Acrylic Prismatic Globe (Tall); 12 Cubic Inch Junction Box Combination 1/2" and 3/4" Knockouts - Black	EA	1	BX	12	12	1	No	22
15620	15620	Utility Light: Tempered Glass Globe - White	EA	1	BX	12	12	1	No	22
15625	15625	Utility Light: Tempered Glass Globe; 12 Cubic Inch Junction Box with Combination 1/2" and 3/4" Knockouts - White	EA	1	BX	12	12	1	No	28
15630	15630	Utility Light: Acrylic Prismatic Globe (Tall) - White	EA	1	BX	12	12	1	No	16
15635	15635	Utility Light: Acrylic Prismatic Globe (Tall); 12 Cubic Inch Junction Box with Combination 1/2" and 3/4" Knockouts - White	EA	1	BX	12	12	1	No	22

Fluorescent Lamps

15680	15680	Compact Fluorescent Lamp: 23-Watt, Self-Ballasted (5,000K) (Light output is equal to a 90-watt Incandescent Lamp)	EA	1	BX	50	50	1	No	8
-------	-------	---	----	---	----	----	----	---	----	---

Universal Mounting Bracket

15690	15690	Universal Mounting Bracket	EA	1	BG	0	0	1	No	6
-------	-------	----------------------------	----	---	----	---	---	---	----	---

Specifications subject to change without prior notice.

Specifications subject to change without prior notice.

E02-019-000 A2 (6/12-SP)
©2012 Engineered Products Company. All Rights Reserved.
SpiderBox is a trademark of Engineered Products Company. Romex is a registered trademark of Southwire.

www.engproducts.com
5401 SMETANA DRIVE | MINNETONKA, MN 55343
P 800.336.1976 | F 800.336.2801

