

59408C

**6-8 PLASTIC SCREW ANCHOR**


UPC: 085937997265

Country of Origin:

UNSPSC: 31162103

**Not Available**

Commodity: Wall anchors

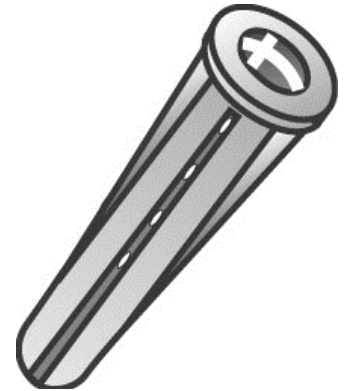

*An injection-molded anchor with a flanged opening at the top end and a cone-shaped body that is cupped at the opposite end.*

**Product Attributes**

Brand Name	Minerallac Company
Sub Brand	Cully
Type	Plastic Anchor
Application	The conical plastic anchor is a light-duty part that can be used in drywall, concrete, and hollow block or brick.
Size	#6 – #8
Length	0.750" IN
Minimum Embedment Depth	0.750" IN
Drill Size	3/16" IN
Material	Engineered Plastic
Tension Strength	In 4,000 PSI Concrete: 210 LB; in hollow brick: 180 LB; in solid red brick: 100 LB
Shear Strength	In 4,000 PSI Concrete: 240 LB; in hollow brick: 215 LB; in solid red brick: 230 LB

Item Status: Active  
Standard Qty: 100

Minerallac Company

Tel: 800-927-3293  
Fax: 800-824-8942  
www.minerallac.com