

59412C

10-12 PLASTIC SCREW ANCHOR


UPC: 085937997289

Country of Origin:

UNSPSC: 31162103

Not Available

Commodity: Wall anchors

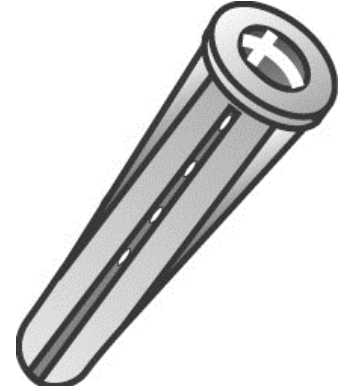

An injection-molded anchor with a flanged opening at the top end and a cone-shaped body that is cupped at the opposite end.

Product Attributes

Brand Name	Minerallac Company
Sub Brand	Cully
Type	Plastic Anchor
Application	The conical plastic anchor is a light-duty part that can be used in drywall, concrete, and hollow block or brick.
Size	#10 – #12
Length	1.000" IN
Minimum Embedment Depth	1.000" IN
Drill Size	1/4" IN
Material	Engineered Plastic
Tension Strength	In 4,000 PSI Concrete: 550 LB; in hollow brick: 350 LB; in solid red brick: 280 LB
Shear Strength	In 4,000 PSI Concrete: 350 LB; in hollow brick: 280 LB; in solid red brick: 320 LB

Item Status: Active
Standard Qty: 100

Minerallac Company

Tel: 800-927-3293
Fax: 800-824-8942
www.minerallac.com