


HEAVY-DUTY UNIT HEATER

APPLICATIONS

Mounts either on the wall or from the ceiling can be used for primary or spot heating. For factories, garages, schools, etc. Airflow can be directed horizontally, vertically or any position between for precise control.

DIMENSIONS

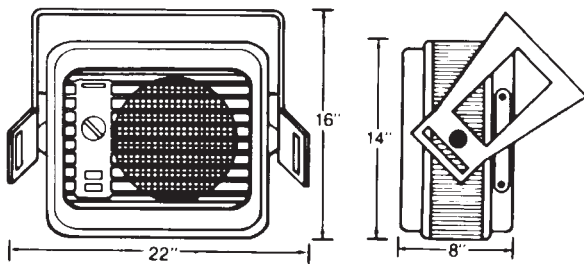

FEATURES

- Multiple wattage heat selector switch. Either 5KW or 3.3KW @ 240V (3.7KW or 2.5KW @ 208V) for just the right amount of heat.
- Fan only switch allows fan to cycle automatically with elements or run continuously for air movement when no heat is required.
- Built-in bi-metal thermostat. Range 40° to 90°F.
- Heater is shipped with ceiling/wall bracket.
- Heavy gauge die-formed steel housing.
- Advanced pull-through air flow design draws air across heating element for more even air distribution and cooler element operation.
- Specially designed venturi outlet to meet that added throw as required in vertical position.
- Completely enclosed fan motor.
- Aluminum-finned, copper clad steel sheath heating element has longer useful life, because of cooler sheath temperature and faster heat dissipation.
- This heater uses a manual reset thermal cut-off with reset button located on front for easy access.
- Ruggedly built, yet lighter weight for easier installation. No piping flues, valves, or traps.
- Meets all UL, NEC, and OSHA requirements.

SPECIFICATIONS

CATALOG NUMBER	VOLTS	WATTS	BTU/HR.	AMPS	WEIGHT
MUH35	240	5000/3333	17,060/11,372	21.0/14.0	28 lbs.
	208	3750/2500	12,795/8,530	18.0/12.0	
PHCS1B	Cord & Plug Assembly (Optional)				

AIR DELIVERY DATA			FAN MOTOR DATA			MAXIMUM EFFECTIVE MOUNTING HEIGHT		HORIZ. AIR THROW	WIRE SIZE
CFM	FPM	ΔT(°F)	VOLTS	RPM	HP	HORIZ.	VERT.		
210	550	71°	240/208	1600	1/100	8	15	24	AWG 10

