


INCANDESCENT / LED 12V HYBRID PATH & SPREAD

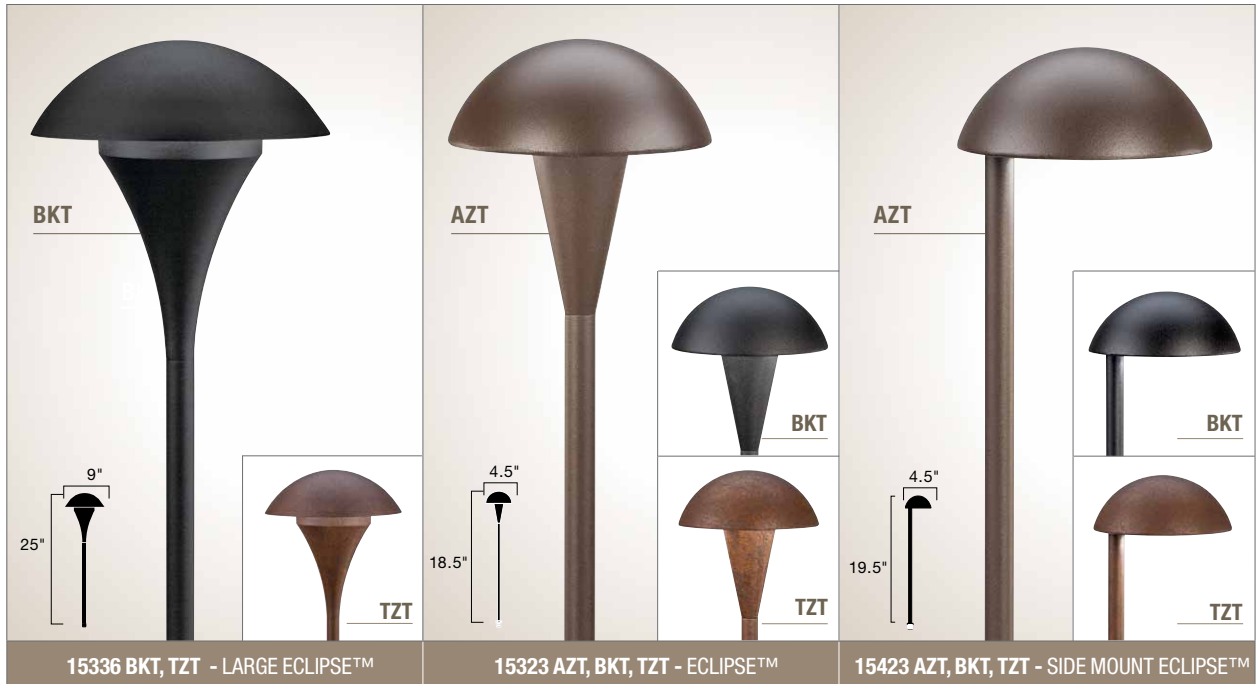

15336 BKT, Tzt - LARGE ECLIPSE™ **15323 AZT, BKT, Tzt - ECLIPSE™** **15423 AZT, BKT, Tzt - SIDE MOUNT ECLIPSE™**

Description	A larger version of our popular Eclipse design to cast a wider light spread on a wide path or patio.	A smaller scale, contemporary design with a dome cap that creates a soft, warm circular glow of light.	Popular dome cap design in a side-mounted fixture for more directional lighting.
Ordering Guide & Finish	15336 BKT - Textured Black 15336 Tzt - Textured Tannery Bronze™	15323 AZT - Textured Architectural Bronze 15323 BKT - Textured Black 15323 Tzt - Textured Tannery Bronze™	15423 AZT - Textured Architectural Bronze 15423 BKT - Textured Black 15423 Tzt - Textured Tannery Bronze™
Housing	Cast Aluminum with clear glass	Cast Aluminum	Cast Aluminum
Lamp Base	12V S8 wedge base socket	12V S8 wedge base socket	12V S8 wedge base socket
Supplied Lamp	24.4-W(VA) 3156K (15598 CLR) Krypton light source Power usage at 12V AC input VA MAX: 24.4-W(VA)	24.4-W(VA) 3156K (15598 CLR) Krypton light source Power usage at 12V AC input VA MAX: 24.4-W(VA)	24.4-W(VA) 3156K (15598 CLR) Krypton light source Power usage at 12V AC input VA MAX: 24.4-W(VA)
Incandescent Lamp Options	18.5-W(VA) 3155K (15599 CLR)	18.5-W(VA) 3155K (15599 CLR)	18.5-W(VA) 3155K (15599 CLR)
LED Lamp Options	2W (18036-18038) see page 159 Compares up to 18.5W Krypton	2W (18036-18038) see page 159 Compares up to 18.5W Krypton	2W (18036-18038) see page 159 Compares up to 18.5W Krypton
Wiring	35" of usable #18-2, SPT-1-W leads Cable connector supplied	37" of usable #18-2, SPT-1-W leads Cable connector supplied	34" of usable #18-2, SPT-1-W leads Cable connector supplied
Mounting Acces. Included	8" In-ground stake	8" In-ground stake	8" In-ground stake
Optional Acces.	15601 - Surface Mounting Flange 15607 - Surface Mounting Bracket	15601 - Surface Mounting Flange 15607 - Surface Mounting Bracket	15601 - Surface Mounting Flange 15607 - Surface Mounting Bracket
Photometric with Supplied Lamp	Distance from Light 1' 2' 3' 4' 5' 6' 7' 8' 9' Footcandles 8.7 3.3 1.1 .4 .1 - - - -	Distance from Light 1' 2' 3' 4' 5' 6' 7' 8' 9' Footcandles 14.7 4.8 1.8 1 - - - -	Distance from Light 0' 1' 2' 3' 4' 5' 6' 7' 8' Footcandles 44.3 18.6 5.7 1.8 .3 .2 - - -

Denotes fixture is compatible with incandescent or LED lamps.

INCANDESCENT/LED 12V HYBRID PATH & SPREAD

P