

T3 Ultra Compact CFLs

12,000 Hours average rated life, 120Volts



Applications:

Simulates natural daylight. Makes colors appear brighter and more vibrant in their natural hue. Excellent for reading and applications that require true color visibility.

See below for specific applications.

Features and Benefits:

- Ultra high efficiency ballast increases lumen output
- Lateral cathode design optimizes thermal efficiency
- Exclusive end of life circuitry
- Long life, 12,000 hours average rated life
- New design and construction improves lumen maintenance over the complete life of the bulb.

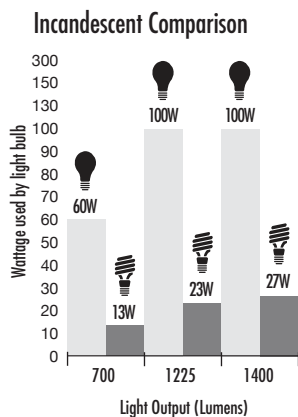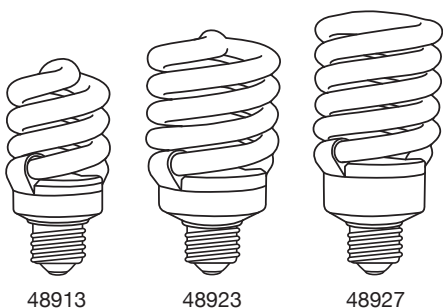

Catalog Number

Notes

Type



Specifications: (at full brightness)

End of Life Protection	Yes
Ballast Type	Electronic
Starting Method	Instant Start
Input Line Voltage	120VAC
Input Line Frequency	50/60HZ
Color Temperature	5500°K
Color Rendering Index	90
Minimum Starting Temperature	-20°F, -29°C
Maximum Operating Temperature	160°F, 71°C
U.L. / C.U.L. Listed	Yes – E149698
FCC Compliance	47 CFR Part 18
Lamp Operating Frequency	45 KHZ
Lamp Current Crest Factor	<1.60
Total Harmonic Distortion	<150%
High Power Factor Rated	>.50

Special Application Notes:

- Up to 23 watt is UL approved for totally enclosed fixtures.
- Use a 27w in an open recessed can. Do not use a 27w in an enclosed recessed can.
- Use voids the warranty.



Warranties and Certifications:	Item.#	Wattage	Incandescent Wattage Comparison	Initial Lumens	M.O.L (inches)	Diameter (inches)	Input Line Current	Lamp Life (hours)	Table/Floor Lamps	Chandeliers	Recessed Cans	Bare Bulb Fixtures	High Bay Fixtures	Ceiling Fixtures	Desk Lamp	Outdoor Covered
 	48913FS	13	60	700	3.9	1.8	.22a	12K	•	•	•	•		•	•	•
	48923FS	23	100	1225	4.4	2.4	.38a	12K	•	•	•	•		•	•	•
	48927FS	27	100	1400	1400	5.1	2.4	.45a	12K	•	•	•	•		•	•