


137APTGX / XR3014

10,000 Hours average rated life, 120Volts

Catalog Number

Notes

Type

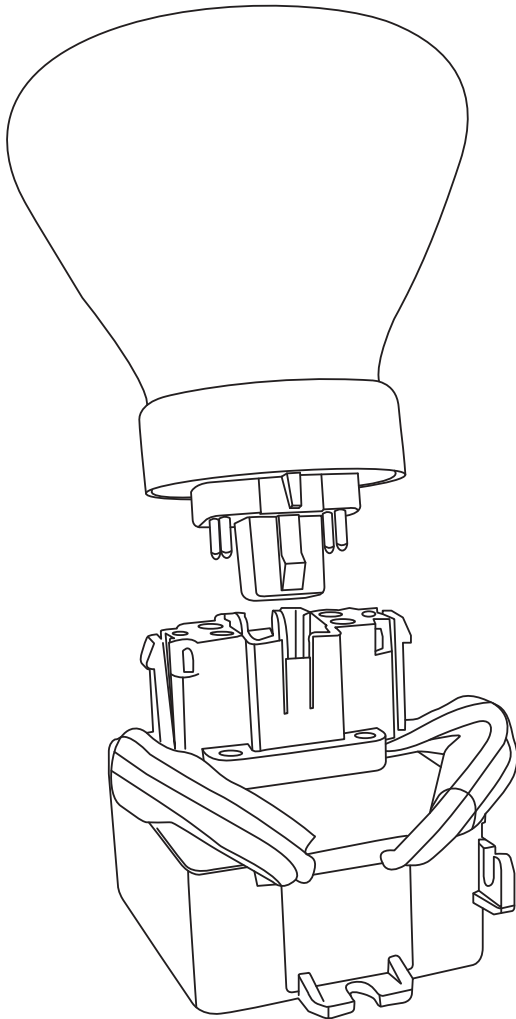

Specifications: (at full brightness)

End of Life Protection	Yes
Ballast Type	Electronic
Starting Method	Modified Rapid Start
Input Line Voltage	120VAC
Input Line Frequency	60HZ
Lamp Life(rated)	10,000 Hours
Ballast Life(rated)	50,000 Hours
Color Temperature	2700°K
Color Rendering Index	82
Minimum Starting Temperature	-20°F, -29°C
Maximum Operating Temperature	160°F, 71°C
U.L. / C.U.L. Listed	Yes
FCC Compliance	Part 18, Subpart C
Lamp Operating Frequency	45 KHZ
Lamp Current Crest Factor	<1.60
Max. Open Circuit Voltage	600V
Total Harmonic Distortion	<150%
Ballast Power Factor	>.50

Warranties and Certifications:	Item #	Description	Wattage	Incandescent Wattage Comparison	Initial Lumens	M.O.L. (inches)	Diameter (inches)	Lamp Life (hours)
<p>cULus 12 MONTH WARRANTY - LAMP</p> <p>ISO 9002 CERTIFIED 36 MONTH WARRANTY - BALLAST</p>	137APTGX/XR3014	14watt R30 Flood Hardwire	14	65	650	6.2	3.7	10K