



LED lamp quick reference guide Effective 5/12/2014

**See pages 18 & 19
for our LED PAR/Reflector
and A lamp guide**



 **SATCO[®]**




NEW!

Dimension™ warm tone dimming R30 LED lamp

Applications/Features

- Indoor residential and commercial lighting
- Entertainment lighting
- Down lighting
- Display lighting
- Accent lighting
- Dims from 2700K to 2200K

12.8W R30 Replaces 65W R30
Dims to warmer color like an incandescent*



RECOMMENDED DIMMERS	
Manufacturer	Model No.
Lutron	SLV600P MAGNETIC LOW VOLTAGE
Lutron	CT-603PGH ECO DIM INCANDESCENT
Lutron	DV600PR DIVA INCANDESCENT
Leviton	6674 UNIVERSAL LED
Cooper	DLC03P LED

Maximum number of lamps per dimmer = 10

Dimension Warm Tone Dimming lamps feature an onboard "Direct Drive" integrated circuit with a microprocessor chip. This "Smart" chip manages the path of current which changes the CCT from 2700K down to 2200K.

This new generation of LED lamp technology has been tested with a wide assortment of dimmers and this list (shown left) reflects the ones we have selected to deliver the best overall dimming experience, while reaching the lowest dim level and lowest possible color temperature.




S9025



S9073 & S9101 Available July 2014

NEW! S9073 R20

NEW! S9101 R40

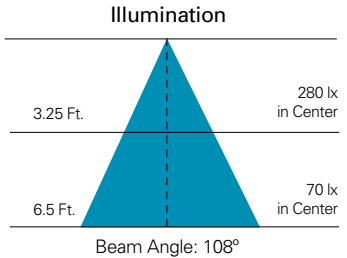

Dimension Warm Tone Dimming R30 LED Lamp



Item Number	Lamp Description	Watts	Volts	CCT	CRI	Lumens	M.O.L. (Inches)	Beam	Life/Hours	Pack
S9025†	12.8R30/LED/2700K	12.8	120	2700K	80	750	5 1/4	108	25,000	12/6
<i>AVAILABLE JULY 2014</i>										
S9073†	7.8R20/LED/2700K	7.8	120	2700K	80	460	3 7/8	108	25,000	12/6
S9101†	16R40/LED/2700K	16	120	2700K	80	1000	6 3/8	108	25,000	12/6

† ENERGY STAR certified.


Pack: Master 12 / Inner 6/1

* Consult Satco or visit www.satco.com for an up to date dimmer compatibility list.
** See separate warranty for complete terms and conditions.

KolourOne Omni^X 10.5W A19 omni-directional LED lamps

Applications / Features

- 60W A19 replacement
- Indoor residential lighting
- Down lighting
- Display lighting
- Table lamps
- Pendants
- Dimmable

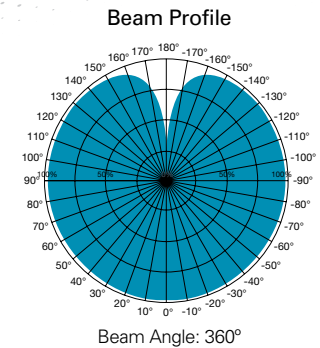

KolourOne Omni^X 10.5W A19 Omni-Directional LED Lamps



Item Number	Lamp Description	Watts	Volts	CCT	CRI	Lumens	M.O.L. (Inches)	Beam	Life/ Hours	Pack
S9037†	10.5A19/OMNI/LED/2700K	10.5	120	2700K	84	810	4 1/2	360	25,000	24/6
S9038†	10.5A19/OMNI/LED/3500K	10.5	120	3500K	83	830	4 1/2	360	25,000	24/6
S9039†	10.5A19/OMNI/LED/5000K	10.5	120	5000K	83	870	4 1/2	360	25,000	24/6


† ENERGY STAR certified.

Pack: Master 24 / Inner 6/1

KolourOne Omni^X 11W A19 omni-directional LED lamp, GU24 base

Applications / Features

- 60W A19 replacement
- Indoor residential lighting
- Down lighting
- Display lighting
- Table lamps
- Pendants
- Dimmable

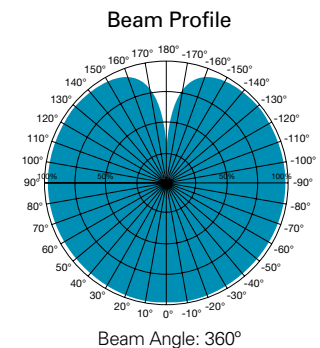

KolourOne Omni^X 11W A19 Omni-Directional LED Lamps



Item Number	Lamp Description	Watts	Volts	CCT	CRI	Lumens	M.O.L. (Inches)	Beam	Life/ Hours	Pack
S9070†	11A19/OMNI/LED/2700K/GU24	11	120	2700K	85	809	4 1/2	360	25,000	24/6

† ENERGY STAR certified.


Pack: Master 24 / Inner 6/1

PANEL ARRAY 2.0 LED LAMPS

KolourOne Panel Array 2.0 7W PAR20 LED lamps

Applications / Features

- Indoor residential and commercial lighting
- Entertainment lighting
- Down lighting
- Display lighting
- Accent lighting
- Dimmable

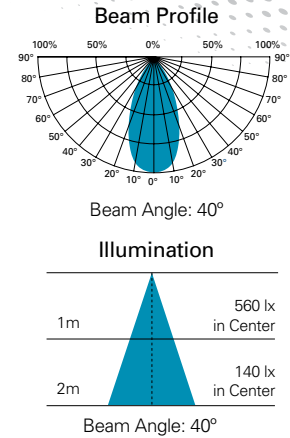

KolourOne Panel Array 2.0 LED PAR20 Lamps



KolourOne
LED TECHNOLOGY

Item Number	Lamp Description	Watts	Volts	CCT	CRI	Lumens	M.O.L. (Inches)	Beam	Life/ Hours	Pack
S8921†	7PAR20/LED/40/2700K/PA 2.0	7	120	2700K	84	420	3 7/16	40	35,000	24/6
S8922†	7PAR20/LED/40/3500K/PA 2.0	7	120	3500K	83	435	3 7/16	40	35,000	24/6
S8923	7PAR20/LED/40/5000K/PA 2.0	7	120	5000K	83	455	3 7/16	40	35,000	24/6


† ENERGY STAR certified.

Pack: Master 24 / Inner 6/1

KolourOne Panel Array 2.0 14W PAR30 short neck LED lamps

Applications / Features

- Indoor residential lighting
- Down lighting
- Display lighting
- Accent lighting
- Dimmable

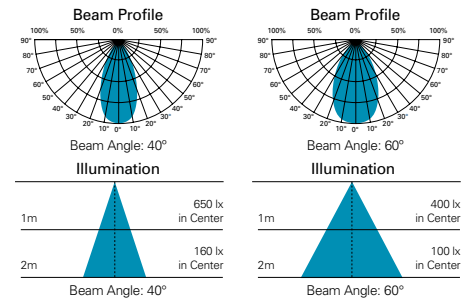

KolourOne Panel Array 2.0 LED PAR30 Short Neck Lamps



KolourOne
LED TECHNOLOGY

Item Number	Lamp Description	Watts	Volts	CCT	CRI	Lumens	M.O.L. (Inches)	Beam	Life/ Hours	Pack
S8934†	14PAR30SN/LED/40/2700K/PA 2.0	14	120	2700K	84	860	3 5/8	40	35,000	12/6
S8935†	14PAR30SN/LED/40/3500K/PA 2.0	14	120	3500K	83	890	3 5/8	40	35,000	12/6
S8936	14PAR30SN/LED/40/5000K/PA 2.0	14	120	5000K	83	930	3 5/8	40	35,000	12/6
S8941†	14PAR30SN/LED/60/2700K/PA 2.0	14	120	2700K	84	860	3 5/8	60	35,000	12/6
S8942†	14PAR30SN/LED/60/3500K/PA 2.0	14	120	3500K	83	890	3 5/8	60	35,000	12/6
S8943	14PAR30SN/LED/60/5000K/PA 2.0	14	120	5000K	83	930	3 5/8	60	35,000	12/6

† ENERGY STAR certified.

Pack: Master 12 / Inner 6/1


PANEL ARRAY 2.0 LED LAMPS

KolourOne Panel Array 2.0 14W PAR30 long neck LED lamps

Applications / Features

- Indoor residential lighting
- Down lighting
- Display lighting
- Accent lighting
- Dimmable

KolourOne Panel Array 2.0 LED PAR30 Long Neck Lamps

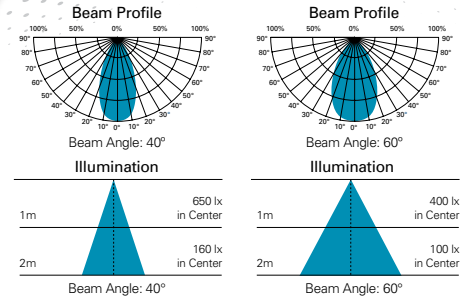

KolourOne
LED TECHNOLOGY

Item Number	Lamp Description	Watts	Volts	CCT	CRI	Lumens	M.O.L. (Inches)	Beam	Life/Hours	Pack
S8947†	14PAR30LN/LED/40/2700K/PA 2.0	14	120	2700K	84	860	4 1/2	40	35,000	12/6
S8948†	14PAR30LN/LED/40/3500K/PA 2.0	14	120	3500K	83	890	4 1/2	40	35,000	12/6
S8949	14PAR30LN/LED/40/5000K/PA 2.0	14	120	5000K	83	930	4 1/2	40	35,000	12/6
S8971†	14PAR30LN/LED/60/2700K/PA 2.0	14	120	2700K	84	860	4 1/2	60	35,000	12/6
S8972†	14PAR30LN/LED/60/3500K/PA 2.0	14	120	3500K	83	890	4 1/2	60	35,000	12/6
S8973	14PAR30LN/LED/60/5000K/PA 2.0	14	120	5000K	83	930	4 1/2	60	35,000	12/6

† ENERGY STAR certified.


Pack: Master 12 / Inner 6/1

KolourOne Panel Array 2.0 14W PAR30 long neck LED lamp, GU24 base

Applications / Features

- Indoor residential lighting
- Down lighting
- Display lighting
- Accent lighting
- Dimmable

KolourOne Panel Array 2.0 LED PAR30 Long Neck Lamp, GU24 Base

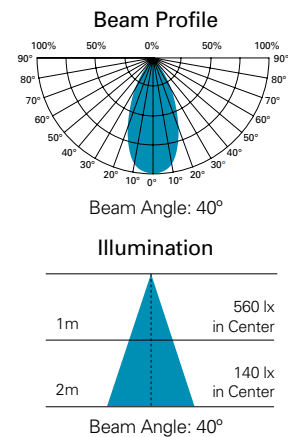

KolourOne
LED TECHNOLOGY

Item Number	Lamp Description	Watts	Volts	CCT	CRI	Lumens	M.O.L. (Inches)	Beam	Life/Hours	Pack
S9054†	14PAR30LN/LED/40/2700K/GU24	14	120	2700K	84	860	4 5/8	40	25,000	12/6

† ENERGY STAR certified.


Pack: Master 12 / Inner 6/1

PANEL ARRAY 2.0 LED LAMPS

KolourOne Panel Array 2.0 17W PAR38 LED lamps

Applications / Features

- Indoor residential and commercial lighting
- Entertainment lighting
- Down lighting
- Display lighting
- Accent lighting
- Dimmable

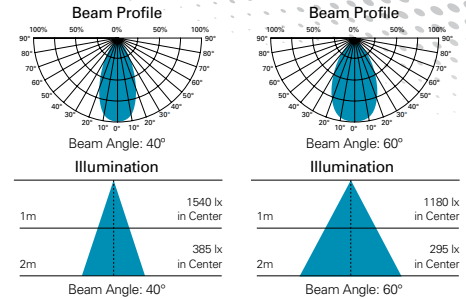

KolourOne Panel Array 2.0 LED PAR38 Lamps

Item Number	Lamp Description	Watts	Volts	CCT	CRI	Lumens	M.O.L. (Inches)	Beam	Life/ Hours	Pack
S8977†	17PAR38/LED/40/2700K/PA 2.0	17	120	2700K	84	1120	5 1/8	40	35,000	12/6
S8978†	17PAR38/LED/40/3500K/PA 2.0	17	120	3500K	83	1160	5 1/8	40	35,000	12/6
S8979	17PAR38/LED/40/5000K/PA 2.0	17	120	5000K	83	1210	5 1/8	40	35,000	12/6
S8984†	17PAR38/LED/60/2700K/PA 2.0	17	120	2700K	84	1120	5 1/8	60	35,000	12/6
S8985†	17PAR38/LED/60/3500K/PA 2.0	17	120	3500K	83	1160	5 1/8	60	35,000	12/6
S8986	17PAR38/LED/60/5000K/PA 2.0	17	120	5000K	83	1210	5 1/8	60	35,000	12/6


† ENERGY STAR certified.

Pack: Master 12 / Inner 6/1

KolourOne Panel Array 2.0 17W PAR38 LED lamp, GU24 base

Applications / Features

- Indoor residential lighting
- Down lighting
- Display lighting
- Accent lighting
- Dimmable

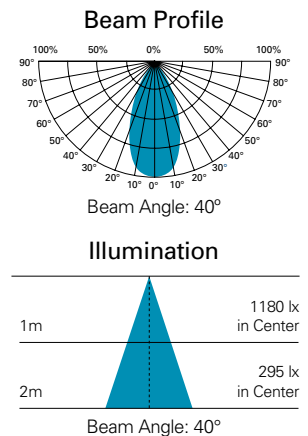

KolourOne Panel Array 2.0 LED PAR30 Long Neck Lamp, GU24 Base



Item Number	Lamp Description	Watts	Volts	CCT	CRI	Lumens	M.O.L. (Inches)	Beam	Life/ Hours	Pack
S9060†	17PAR38/LED/40/2700K/GU24	17	120	2700K	84	1120	5	40	25,000	12/6

† ENERGY STAR certified.


Pack: Master 12 / Inner 6/1

INDOOR/OUTDOOR LED PAR LAMPS

Indoor/Outdoor KolourOne Duo™ 7W PAR20 LED lamp

Applications / Features

- Indoor residential and commercial lighting
- Outdoor security and landscape lighting
- Down lighting
- Display lighting
- Accent lighting
- Dimmable
- IP65 rated

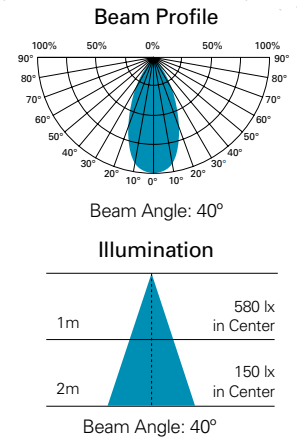

KolourOne Duo PAR20 Indoor/Outdoor LED Lamp



Item Number	Lamp Description	Watts	Volts	CCT	CRI	Lumens	M.O.L. (Inches)	Beam	Life/ Hours	Pack
S9014†	7PAR20/LED/40/3500K/IP65	7	120	3500K	83	400	3 ⁷ / ₁₆	40	25,000	24/6


† ENERGY STAR certified.

Pack: Master 24 / Inner 6/1

Indoor/Outdoor KolourOne Duo™ 13W PAR30 short neck LED lamp

Applications / Features

- Indoor residential and commercial lighting
- Outdoor security and landscape lighting
- Down lighting
- Display lighting
- Accent lighting
- Dimmable
- IP65 rated

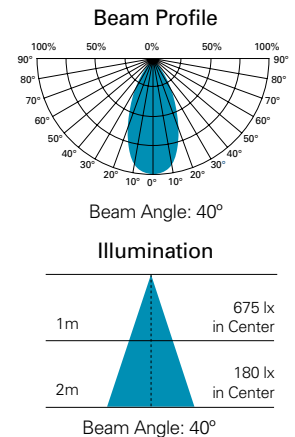

KolourOne Duo PAR30 Short Neck Indoor/Outdoor LED Lamp



Item Number	Lamp Description	Watts	Volts	CCT	CRI	Lumens	M.O.L. (Inches)	Beam	Life/ Hours	Pack
S9017†	13PAR30SN/LED/40/3500K/IP65	13	120	3500K	83	820	3 ⁵ / ₈	40	25,000	12/6

† ENERGY STAR certified.


Pack: Master 12 / Inner 6/1

INDOOR/OUTDOOR LED PAR LAMPS

Indoor/Outdoor KolourOne Duo™ 13W PAR30 long neck LED lamp

Applications / Features

- Indoor residential and commercial lighting
- Outdoor security and landscape lighting
- Down lighting
- Display lighting
- Accent lighting
- Dimmable
- IP65 rated

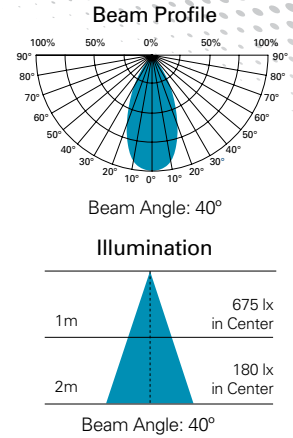

KolourOne Duo PAR30 Long Neck Indoor/Outdoor LED Lamp



Item Number	Lamp Description	Watts	Volts	CCT	CRI	Lumens	M.O.L. (Inches)	Beam	Life/ Hours	Pack
S9020†	13PAR30LN/LED/40/3500K/IP65	13	120	3500K	83	820	4 1/2	40	25,000	12/6


† ENERGY STAR certified.

Pack: Master 12 / Inner 6/1

Indoor/Outdoor KolourOne Duo™ 17W PAR38 LED lamp

Applications / Features

- Indoor residential and commercial lighting
- Outdoor security and landscape lighting
- Down lighting
- Display lighting
- Accent lighting
- Dimmable
- IP65 rated

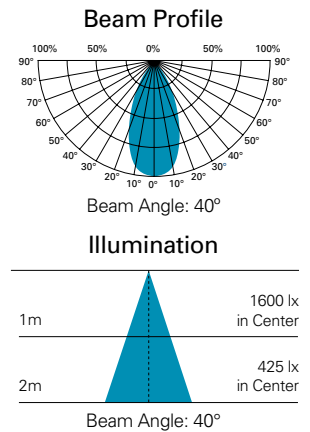

KolourOne Duo PAR38 Indoor/Outdoor LED Lamp



Item Number	Lamp Description	Watts	Volts	CCT	CRI	Lumens	M.O.L. (Inches)	Beam	Life/ Hours	Pack
S9023†	17PAR38/LED/40/3500K/IP65	17	120	3500K	83	1130	5 1/8	40	25,000	12/6

† ENERGY STAR certified.

Pack: Master 12 / Inner 6/1

LED REFLECTOR LAMPS

Ditto™ LED Reflector lamps

Same R20 shape.
Advanced LED technology!


Applications / Features

- Down lighting
- Accent lighting
- Dimmable
- 2.5" = standard R20

2.5" Reflector




Beam Profile

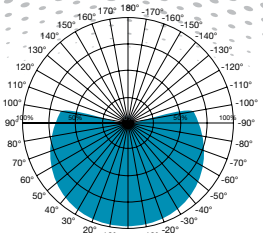

Beam Angle: 106°

Illumination

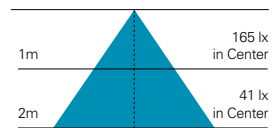

Beam Angle: 106°

Ditto 2.5" LED Reflector Lamps



Item Number	Lamp Description	Watts	Volts	CCT	CRI	Lumens	M.O.L. (Inches)	Beam	Life/ Hours	Pack
S9040†	8LEDREFLECTOR/2700K/E26	8	120	2700K	†80	500	4	106	25,000	24/6
S9002†	8LEDREFLECTOR/3000K/E26	8	120	3000K	†80	520	4	106	25,000	24/6
S9041	8LEDREFLECTOR/4000K/E26	8	120	4000K	†80	540	4	106	25,000	24/6
S9042	8LEDREFLECTOR/5000K/E26	8	120	5000K	†80	560	4	106	25,000	24/6

† ENERGY STAR certified.

Pack: Master 24 / Inner 6/1

Ditto™ LED Reflector lamps

Same BR30 shape.
Advanced LED technology!

Applications / Features

- Down lighting
- Accent lighting
- Dimmable
- 3.75" = standard BR30


3.75" Reflector



E26 Base


GU24 Base

Beam Profile

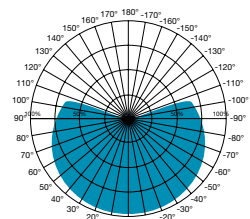

Beam Angle: 108°

Illumination

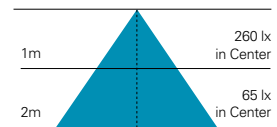

Beam Angle: 108°

Ditto 3.75" LED Reflector Lamps



Item Number	Lamp Description	Watts	Volts	CCT	CRI	Lumens	M.O.L. (Inches)	Beam	Life/ Hours	Pack
S9043†	11LEDREFLECTOR/2700K/E26	11	120	2700K	†80	750	5 ³ / ₁₆	108	25,000	12/6
S8993†	11LEDREFLECTOR/3000K/E26	11	120	3000K	†80	800	5 ³ / ₁₆	108	25,000	12/6
S8994*	11LEDREFLECTOR/3000K/GU24	11	120	3000K	†80	800	4 ¹ / ₂	108	25,000	12/6
S9044	11LEDREFLECTOR/4000K/E26	11	120	4000K	†80	800	5 ³ / ₁₆	108	25,000	12/6
S9045	11LEDREFLECTOR/5000K/E26	11	120	5000K	†80	830	5 ³ / ₁₆	108	25,000	12/6

† ENERGY STAR certified.

Pack: Master 12 / Inner 6/1

* ENERGY STAR CSD (Certified Lighting Sub Component) Listed.

LED REFLECTOR LAMPS

Ditto™ LED Reflector lamps

Same R40 shape.
Advanced LED technology!


Applications / Features

- Down lighting
- Accent lighting
- Dimmable
- 5" = standard R40


5" Reflector



Beam Profile

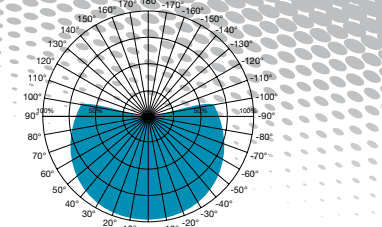

Beam Angle: 105°

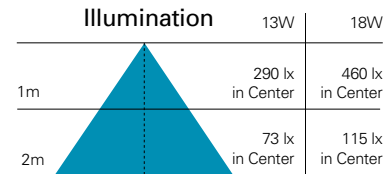

Beam Angle: 105°

Ditto 5" LED Reflector Lamps



Item Number	Lamp Description	Watts	Volts	CCT	CRI	Lumens	M.O.L. (Inches)	Beam	Life/ Hours	Pack
S9046†	13LEDREFLECTOR/2700K/E26	13	120	2700K	†80	850	6 1/2	105	25,000	12/6
S9003†	13LEDREFLECTOR/3000K/E26	13	120	3000K	†80	880	6 1/2	105	25,000	12/6
S9047	13LEDREFLECTOR/4000K/E26	13	120	4000K	†80	920	6 1/2	105	25,000	12/6
S9048	13LEDREFLECTOR/5000K/E26	13	120	5000K	†80	950	6 1/2	105	25,000	12/6
S9049†	18LEDREFLECTOR/2700K/E26	18	120	2700K	†80	1200	6 1/2	105	25,000	12/6
S9006†	18LEDREFLECTOR/3000K/E26	18	120	3000K	†80	1230	6 1/2	105	25,000	12/6
S9050	18LEDREFLECTOR/4000K/E26	18	120	4000K	†80	1280	6 1/2	105	25,000	12/6
S9051	18LEDREFLECTOR/5000K/E26	18	120	5000K	†80	1320	6 1/2	105	25,000	12/6

† ENERGY STAR certified.

Pack: Master 12 / Inner 6/1

LED PAR LAMPS

Ditto™ 7W LED PAR20 lamps


Same PAR20 shape.
Advanced LED technology!

Applications / Features

- Entertainment lighting
 - Down lighting
 - Display lighting
 - Accent lighting
 - Dimmable
- 7W PAR20 replaces 50PAR20




Illumination

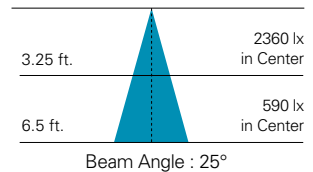

Beam Angle : 25°

Illumination

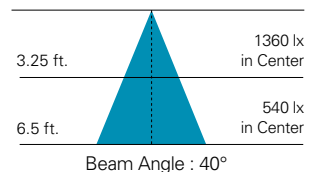

Beam Angle : 40°



Ditto 7W PAR20 LED Lamps

Item Number	Lamp Description	Watts	Volts	CCT	CRI	Lumens	M.O.L. (Inches)	Beam	Life/ Hours	Pack
S9080†	7PAR20/LED/25°/3000K/120/D	7	120	3000K	80	415	3 1/4	25	25,000	12/6
S9081	7PAR20/LED/25°/4000K/120/D	7	120	4000K	80	430	3 1/4	25	25,000	12/6
S9082†	7PAR20/LED/40°/3000K/120/D	7	120	3000K	80	415	3 1/4	40	25,000	12/6
S9083	7PAR20/LED/40°/4000K/120/D	7	120	4000K	80	430	3 1/4	40	25,000	12/6

† ENERGY STAR certified.

Pack: Master 12 / Inner 6/1

LED PAR LAMPS



Ditto™ 11W LED PAR30 short neck lamps

Same PAR30 shape. Advanced LED technology!

Applications / Features

- Entertainment lighting
- Down lighting
- Display lighting
- Accent lighting
- Dimmable

11W PAR30 replaces up to 75PAR30

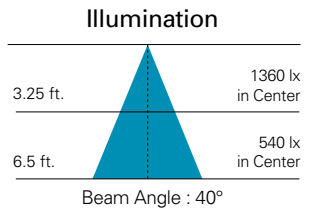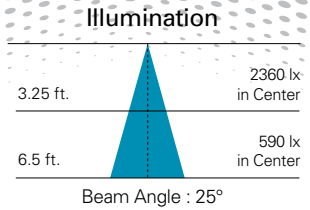

Ditto 11W PAR30 LED short neck Lamps



Item Number	Lamp Description	Watts	Volts	CCT	CRI	Lumens	M.O.L. (Inches)	Beam	Life/Hours	Pack
S9084	11PAR30/SN/LED/25°/3000K/120/D	11	120	3000K	80	750	3 5/8	25	25,000	12/6
S9085	11PAR30/SN/LED/25°/4000K/120/D	11	120	4000K	80	780	3 5/8	25	25,000	12/6
S9086	11PAR30/SN/LED/40°/3000K/120/D	11	120	3000K	80	750	3 5/8	40	25,000	12/6
S9087	11PAR30/SN/LED/40°/4000K/120/D	11	120	4000K	80	780	3 5/8	40	25,000	12/6

3000K ENERGY STAR pending August 2014.

Pack: Master 12 / Inner 6/1

Ditto™ 11W LED PAR30 long neck lamps

Same PAR30 shape. Advanced LED technology!



Applications / Features

- Entertainment lighting
- Down lighting
- Display lighting
- Accent lighting
- Dimmable

11W PAR30 replaces up to 75PAR30



11W PAR30 Replaces 75PAR30

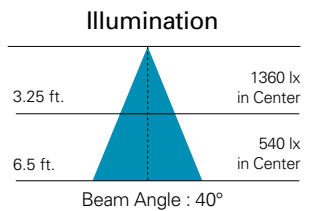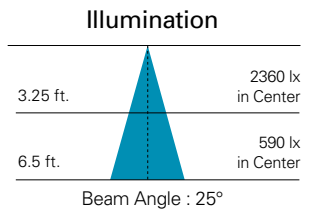

Ditto 11W PAR30 long neck LED Lamps



Item Number	Lamp Description	Watts	Volts	CCT	CRI	Lumens	M.O.L. (Inches)	Beam	Life/Hours	Pack
S9088†	11PAR30/LN/LED/25°/3000K/120/D	11	120	3000K	80	750	4 1/16	25	25,000	12/6
S9089	11PAR30/LN/LED/25°/4000K/120/D	11	120	4000K	80	780	4 1/16	25	25,000	12/6
S9090†	11PAR30/LN/LED/40°/3000K/120/D	11	120	3000K	80	750	4 1/16	40	25,000	12/6
S9091	11PAR30/LN/LED/40°/4000K/120/D	11	120	4000K	80	780	4 1/16	40	25,000	12/6

† ENERGY STAR certified.

Pack: Master 12 / Inner 6/1



LED PAR LAMPS

Ditto™ 17W LED PAR38 lamps

Same PAR38 shape. Advanced LED technology!

Applications / Features

- Entertainment lighting
 - Down lighting
 - Display lighting
 - Accent lighting
- 17W PAR38 replaces 90PAR35

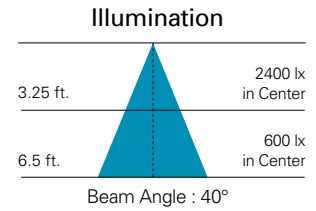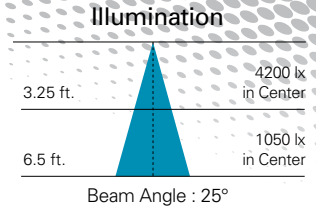

Ditto 17W PAR38 LED Lamps

Item Number	Lamp Description	Watts	Volts	CCT	CRI	Lumens	M.O.L. (Inches)	Beam	Life/Hours	Pack
S9092†	17PAR38/LED/25°/3000K/120/D	17	120	3000K	80	1200	5 ³ / ₁₆	25	25,000	6/1
S9093	17PAR38LED/25°/4000K/120/D	17	120	4000K	80	1250	5 ³ / ₁₆	25	25,000	6/1
S9094†	17PAR38/LED/40°/3000K/120/D	17	120	3000K	80	1200	5 ³ / ₁₆	40	25,000	6/1
S9095	17PAR38/LED/40°/4000K/120/D	17	120	4000K	80	1250	5 ³ / ₁₆	40	25,000	6/1

† ENERGY STAR certified.


Pack: Master 12 / Inner 6/1

MR16 LED LAMPS

MR16 LED lamps

Applications / Features

- Down lighting
- Accent lighting
- Pendant lighting
- Dimmable

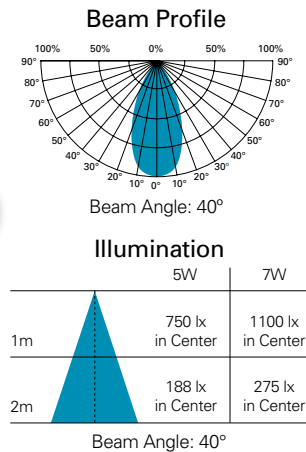

MR16 LED Lamps

Item Number	Lamp Description	Watts	Volts	CCT	CRI	Lumens	M.O.L. (Inches)	Beam	Life/Hours	Pack
S9008	5MR16/LED/3000K/GU10	5	120	3000K	†80	370	2 1/8	40	25,000	12/1
S9009	5MR16/LED/5000K/GU10	5	120	5000K	†80	400	2 1/8	40	25,000	12/1
S9096	7MR16/LED/3000K/GU10	7	120	3000K	†80	520	2 1/8	40	25,000	12/1
S9097	7MR16/LED/5000K/GU10	7	120	5000K	†80	560	2 1/8	40	25,000	12/1
S9103	7MR16/LED/40°/27K/12V/DIM	7	12	2700K	†80	500	1 7/8	40	25,000	12/1
S9104††	7MR16/LED/40°/3K/12V/DIM	7	12	3000K	†80	520	1 7/8	40	25,000	12/1
S9105	7MR16/LED/40°/4K/12V/DIM	7	12	4000K	†80	540	1 7/8	40	25,000	12/1
S9106	7MR16/LED/40°/5K/12V/DIM	7	12	5000K	†80	560	1 7/8	40	25,000	12/1

†† ENERGY STAR pending August 2014

Pack: Master 12/1 (Carded)

PAR16 LED LAMPS


LED PAR16 lamps

Applications / Features

- Down lighting
- Accent lighting
- Pendant lighting
- Dimmable




Beam Profile

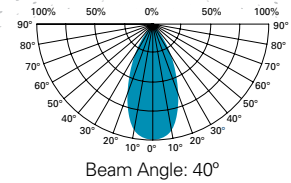

Beam Angle: 40°

Illumination

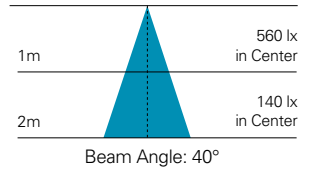

LED PAR16 Lamps

Item Number	Lamp Description	Watts	Volts	CCT	CRI	Lumens	M.O.L. (Inches)	Beam	Life/ Hours	Pack
S8997	6PAR16/LED/3000K/E26	6	120	3000K	†80	370	3 1/4	40	25,000	12/1

Pack: Master 12/1 (Carded)

A19 LED LAMPS

A19 LED lamps

Applications / Features

- Down lighting
- Accent lighting
- Pendant lighting
- Dimmable




S8995

S8794
GU24 Base

S9007

Beam Profile

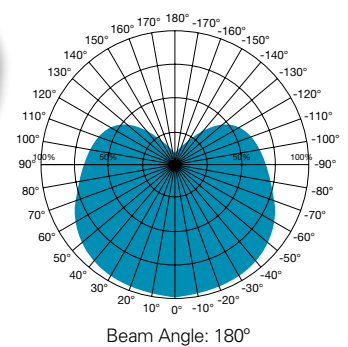

Beam Angle: 180°

A19 LED Lamps

Item Number	Lamp Description	Watts	Volts	CCT	CRI	Lumens	M.O.L. (Inches)	Beam	Life/ Hours	Pack
S8794	8A19/LED/2700K/GU24	8	120	2700K	†80	450	4 1/4	180	25,000	24/1*
S8995†	8A19/LED/3000K/E26	8	120	3000K	†80	450	4 1/4	180	25,000	12/1
S9007†	10A19/LED/2700K/E26	10	120	2700K	†80	800	4 1/2	180	25,000	12/1

† ENERGY STAR certified.

*Pack: Master 24 / Inner 6/1
Pack: Master 12 / Inner 6/1

DECORATIVE LED LAMPS

Decorative LED lamps

Applications / Features

- Down lighting
- Accent lighting
- Pendant lighting
- Dimmable




S9052, S9053,
S9069

S8982

S8996
S8981

Candle Beam Profile

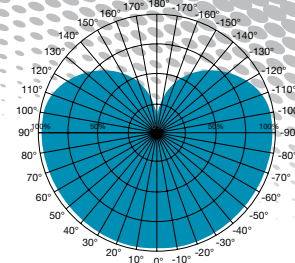

Beam Angle: 240°

Decorative LED Lamps

Item Number	Lamp Description	Watts	Volts	CCT	CRI	Lumens	M.O.L. (Inches)	Beam	Life/ Hours	Pack
S8996	3CTC/LED/3000K/E12	3	120	3000K	↑80	165	3 3/4	240	25,000	12/1
S8981	5CTC/LED/3000K/E12	5	120	3000K	↑80	310	3 3/4	240	25,000	12/1
S8982	5ETC/LED/3000K/E26	5	120	3000K	↑80	310	3 3/4	240	25,000	12/1
S9052	8G25/LED/2700K/E26	8	120	2700K	↑80	420	4 1/4	-	25,000	24/6
S9053†	8G25/LED/3000K/E26	8	120	3000K	↑80	450	4 1/4	-	25,000	24/6
S9069	8G25/LED/5000K/E26	8	120	5000K	↑80	460	4 1/4	-	25,000	24/6

† ENERGY STAR certified.

Pack: Master 24 / Inner 6/1

LED DOWNLIGHT RETROFIT


4" to 6" KolourOne Sprint™ 13.5W LED downlight retrofit

Applications / Features


- Indoor residential and commercial lighting
- Replaces incandescent medium base 120V lamps
- Works with 4" to 6" cans
- Dimmable
- Color rings included



Illumination

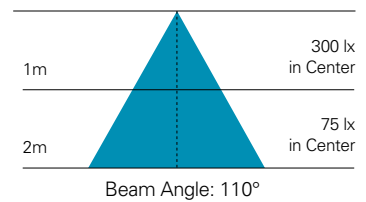

Beam Angle: 110°

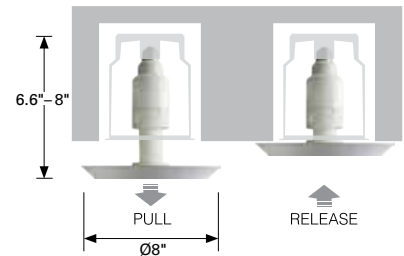

KolourOne Sprint™ Downlight Retrofit LED Lamps



Item Number	Lamp Description	Watts	Volts	CCT	CRI	Lumens	M.O.L. (Inches)	Beam	Life/ Hours	Pack
S8848†	13.5WLED/DLR-SPRINT	13.5	120	2700K	84	860	6 5/8 - 8	110	25,000	6/1

† ENERGY STAR certified.



Pack: Master 6/1

LED DOWNLIGHT RETROFITS

4" LED recessed downlight Retrofit

Applications / Features

- Residential
- Office
- Retail
- Hospitality
- Dimmable
- S8991 Damp location listed
- S9076 Wet location listed

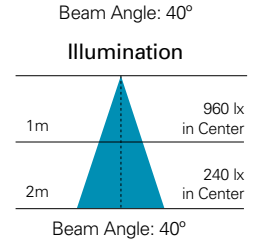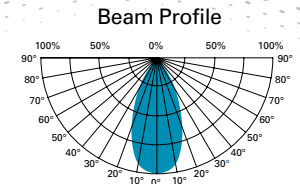

4" LED Recessed Downlight Retrofit

Item Number	Lamp Description	Watts	Volts	Base	CCT	CRI	Lumens	M.O.L. (Inches)	Beam	Life/Hours	Pack
S8991†	9WLED/RDL/4"/120V/DIM	9	120	E26*	3000K	82	650	2 1/2	40	40,000	12/1
S9076†	8WLED/RDL/4"/120V/DIM	8	120	E26*	3000K	82	550	2 5/8	90	40,000	12/1



† ENERGY STAR certified.

*GU10 base sold separately, item number: S9000

5", 6" LED recessed downlight Retrofit

Applications / Features

- Residential
- Office
- Retail
- Hospitality
- Dimmable
- Wet location listed

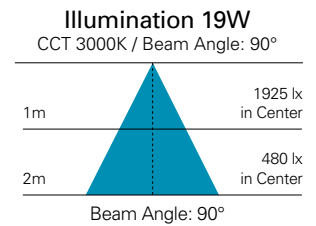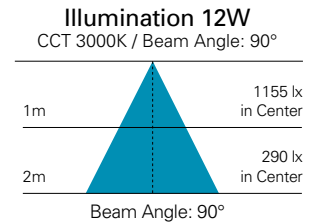

5", 6" LED Recessed Downlight Retrofit

Item Number	Lamp Description	Watts	Volts	Base	CCT	CRI	Lumens	M.O.L. (Inches)	Beam	Life/Hours	Pack
S9077†	12WLED/RDL/5-6/120V/DIM	12	120	E26*	3000K	182	800	3 3/8	90	40,000	12/1
S9079†	19WLED/RDL/5-6/120V/DIM	19	120	E26*	3000K	182	1180	3 3/8	90	40,000	12/1

† ENERGY STAR certified.

*GU24 base sold separately, item number: S8999

LED MINIATURE LAMPS

2W miniature LED lamps

Applications / Features

- Landscape lighting
- Display lighting
- Accent lighting
- Security lighting
- Non dimmable



Landscape BA15S
S8968



G4 Bi-Pin
S8969

2W Miniature LED Lamps – Non-Dimmable

Item Number	Lamp Description	Watts	Volts	CCT	CRI	Lumens	M.O.L. (Inches)	Beam	Life/Hours	Pack
S8968	2W/LANDSCAPE/BA15S	2	12	3000K	180	100	1 5/8	–	25,000	24
S8969	2W/G4/BI-PIN	2	12	3000K	180	110	1 5/8	–	25,000	24

Pack: Master 24

LED ELEVATOR/ SPECIALTY LAMPS

LED Elevator lamps

Applications / Features

- Elevator lighting
- Display lighting
- Non dimmable

Not for use with dimmers.
Recommended for use with magnetic transformers. Compatibility with electronic transformers minimum load requirement must be verified.



S9005



S9004

LED Elevator Lamps

Item Number	Lamp Description	Watts	Volts	CCT	CRI	Lumens	M.O.L. (Inches)	Beam	Life/Hours	Pack
S9005	2W/GBF/LED/12V/BA15D	2	12	3000K	180	120	1 3/4	–	30,000	48/12
S9004	3W/1383/LED/12V/BA15S	3	12	3000K	180	120	2 1/2	–	30,000	48/12

Indoor use only. Not for use in totally enclosed fixtures.

Pack: Master 48 / Inner 12/1

LED RETROFIT KIT

NEW!

Motivation™ circular LED module retrofit kit

Featuring KolourOne™ LED technology

LED Retrofit Kit easily converts most standard flushmount fixtures to Energy Efficient, Environmentally Friendly LED Lighting. Kit includes instructions and all hardware necessary for installation into a wide variety of fixtures.

Features:

- Multiple mounting methods for ease of installation. Please read instructions for best mounting method for your fixture type.
- No external driver or heat sink, making module easily replaceable
- Simple plug in power feed (Plug and Play)
- Sleek, space saving design allows for installation into many fixture types (8.125"D x 0.75"H)
- cUL Damp location listed
- cETL Listed as a recognized component for retrofit
- Module is listed by ENERGY STAR® as a certified sub-component
- Available in two color temperatures (2700K & 3500K)
- High lumen output with excellent color rendering. Savings of 80% over comparable incandescent lamps.
- Dimmable with low voltage electronic dimmers
- 30,000 hour rated life
- 3 year warranty

Specifications:

- Construction: Molded body with 5VA rated clear optic polycarbonate lens
- Power supply: 120 VAC
- Light source: Wooree/KolourOne 5050 LED's 2700K & 3000K
- Finish: White body with clear optic lens
- Dimming: Dimming to 15% with low voltage electronic dimmer
- Standards: cUL Listed damp location (E359393) cETL Listed recognized component for retrofit (4009498)
- Certifications: LED Module in certified sub-component database (CSD) listing by ENERGY STAR®



Each kit contains:

- 1-Circular light engine (shown above)
- 1-Power feed 
- 6-Small wire nuts 
- 6-Medium wire nuts 
- 1-Center mount lock down kit
 -  Lock-down retaining ring
 -  1" Check ring
 -  Metal washer
 -  Rubber washer
- 1-Magnetic lock down kit (3) - 1/2" x 1/8" Magnets 
- 1-Self tapping screw lock down kit (3) - 1" Self-Tapping #4 Screws 
- Assorted snap-in wire grommets (4 x 2 Each) 
- 7/8" #4-40 Machine Screws & Nuts (3 Each) 
- Instructions and wiring diagrams

Circular LED Module Retrofit Kit

Item Number	Lamp Description	Watts	Volts	CCT	CRI	Lumens	M.O.L. (Inches)	Beam	Life/Hours	Pack
S9131	19.5W/LED/CIRCLE MODULE/27K	19.5	120	2700K	84	1420	8 1/4 (DIA.)	110	30,000	10
S9132†	19.5W/LED/CIRCLE MODULE/35K	19.5	120	3500K	83	1450	8 1/4 (DIA.)	110	30,000	10

* Consult Satco or visit www.satco.com for an up to date dimmer compatibility list.

Pack: Master 10

** See separate warranty for complete terms and conditions.

† Available July 2014

Satco PAR and reflector LED lamp guide



Panel Array 2.0 LED PAR lamps

Satco's Panel Array 2.0 LED lamps deliver smooth general lighting with no harsh cut off and exact color consistency from lamp to lamp due to KolourOne™ optical technologies. These highly engineered lamps are built to take on the toughest indoor commercial & residential applications.

- Smooth optical beam
- 2700K, 3500K and 5000K
- 40° and 60° beam angles
- Dimmable
- Commercial warranty*
- ENERGY STAR certified



Duo indoor/outdoor LED PAR lamps

Duo lamps are engineered by KolourOne™ to excel in tough environments, indoors or out. Exact color matching from lamp to lamp makes them perfect for large indoor or outdoor applications. And the high lumen output and long throw distance makes lighting from high ceilings and creating dramatic outdoor effects no problem.

- Defined optical beam
- Greater throw distance
- 3500K
- 40° Beam angle
- Dimmable
- Commercial warranty*
- Outdoor Use / IP65 rated
- ENERGY STAR certified



Ditto LED PAR lamps

Designed to deliver indoor display and general lighting at a great value. They share the same dimensions as standard PAR lamps making them an easy choice for so many residential or light commercial applications.

- Defined optical beam
- Greater throw distance
- 3000K and 4000K
- 25° and 40° Beam angles
- Dimmable
- Residential warranty**
- ENERGY STAR certification to be completed by April, 2014



Ditto LED reflector lamps

The original "consumer friendly" LED replacement-clean/ simple/ familiar. Wide beam angles in many color temperatures make them the first choice for many residential general lighting applications.

- Smooth optical beam
- 2700K, 3000K, 4000K and 5,000K
- 105°, 106° and 108° beam angles
- Dimmable
- Residential warranty**
- ENERGY STAR certified

* Commercial or residential use, no limitation on hours per day.

** Residential use based on 4 hours per day.

Satco A19 LED lamp guide



Omni-directional 10.5 and 11 Watt LED A19

Satco omni-directional A19 LED lamps deliver the same light distribution as typical A19 lamps with no shadows and even light. Innovative engineering enables these lamps to deliver a full 360 degrees of illumination and stand up to virtually any commercial application.

- Full 360° illumination
- 2700K, 3500K and 5000K, E26 base
- GU24 base available in 2700K
- Dimmable
- Commercial warranty*
- ENERGY STAR certified



8 Watt LED A19

This versatile non omni-directional LED A19 is a perfect choice for many residential applications—lamps, wall fixtures, pendants— with its base choice and wide dimming range. They feature a 3 year warranty and long, 25,000 hour life span.

- 180° illumination
- 2,700K and 3,000K, E26 base
- GU24 base available in 2700K
- Dimmable
- Residential warranty**
- ENERGY STAR certified (E26 base only)



10 Watt LED A19

Satco's 10W non omni-directional LED A19 is a perfect energy efficient replacement for the 60W incandescent bulb. It will lend itself to a host of household applications while saving energy and lasting at least 25,000 hours.

- 180° illumination
- 2700K
- E26 base
- Dimmable
- Residential warranty**
- ENERGY STAR certified

Satco LED solutions. LED replacement lamps that only experience can deliver.





National Toll-Free: 800.43.SATCO (800.437.2826)
www.satco.com

Distribution Centers:



FLORIDA
900 N.W. 159th Dr.
Miami, FL 33169
800.437.2826
305.624.2044
Fax 305.623.0286

WASHINGTON
4710 116th St. S.W.
Mukilteo, WA 98275
800.437.2826
425.789.3300
Fax 425.789.3310

PUERTO RICO
Campeche St. 23
Julio N. Matos
Industrial Park,
Carolina, PR 00984
787.757.3510
Fax 787.757.3540

CALIFORNIA
31288 San Benito St.
Hayward, CA 94544
800.437.2826
510.487.4822
Fax 510.487.8955

TEXAS
2000 Valwood Parkway
Farmers Branch, TX 75234
800.437.2826
972.247.2437
Fax 972.247.5408



Corporate Offices and
Distribution Center:

NEW YORK
110 Heartland Blvd.
Brentwood, NY 11717
800.437.2826
631.243.2022
Fax 631.243.2027