

## LOW VOLTAGE HALOGEN BUTTON LIGHT


## HR-88



Surface Mounted



Recessed Mounted

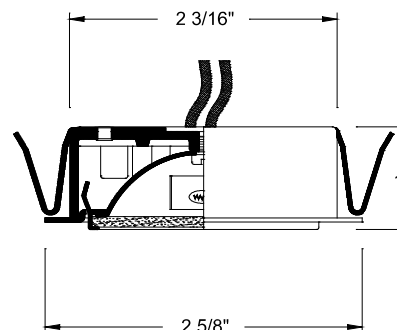

### Ordering Matrix

Model	Series	Finish						
<input type="text"/>	<input type="text"/>	<input type="text"/>						
HR	88	BK	BN	CH	DB	WT	CB	

Ordering Example (model number – series – finish): HR-88-CH

### Product Details

**Description:** Round surface or recessed mount button light suitable for wood surfaces such as cabinets and displays. Used as a surface mounted unit with the supplied outer housing or used as a recessed unit by removal of the outer housing.

**Materials:** Cast aluminum inner housing with a decorative outer steel housing included for surface mounting; outer housing is discarded when used as a recessed fixture. The socket is a bi-pin ceramic with 72" 20 gauge fiberglass lead wires. Supplied with Halogen bi-pin lamp and clear glass lens.

**Transformer:** Remote class II required. Ordered separately.

**Lamping:** Low voltage halogen JC-20 (20W) included.

**Cutout:** 2 3/8"

**Accessories:** Frosted Lens available, ordering code = LENS-45-FR

**Listing:** UL & CUL Listed. E204239

### Specification Features

- Available in a choice of five abrasion resistant paint finishes;  
 BK = Black    BN = Brushed Nickel  
 CH = Chrome    DB = Dark Bronze  
 WT = White    CB = Copper Bronze
- Versatile choice for low profile source lighting. Not intended for ceilings.
- Dimmable with electronic low voltage dimmers.
- Suitable for damp location
- 5 year WAC Lighting product warranty.

### Compatible Class II Transformers (sold separately):

#### EN-1260-R2

Electronic Transformer  
 UL Listed Class II Component  
 120v input – 12v output  
 60 watt maximum



#### EN-1260-RB2

Electronic Transformer  
 UL Listed Class II  
 120v input – 12v output  
 60 watt maximum



#### EN-1260-P-AR

Electronic Transformer  
 UL Listed Class II  
 120v input – 12v output  
 60 watt maximum

