



Industrial Product Guide

For suspending Mechanical & Electrical services,
HVAC and Signage






Standard Gripple HF


The standard Gripple Hang Fast (HF) range is used to suspend, brace, and secure any services.

- Up to 6 times faster to install than traditional hanging systems
- Supplied as a ready-to-use kit
- Improves work comfort and safety
- Reduced volume and easy handling
- Strong, versatile
- Aesthetically discreet and lightweight
- Available in 5 load rated sizes and in Stainless steel (page 47)
- Certified

Installation

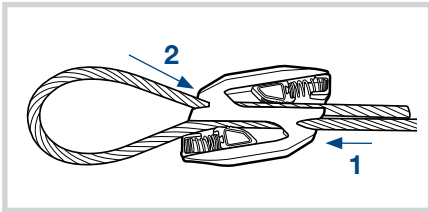

End fixing choices

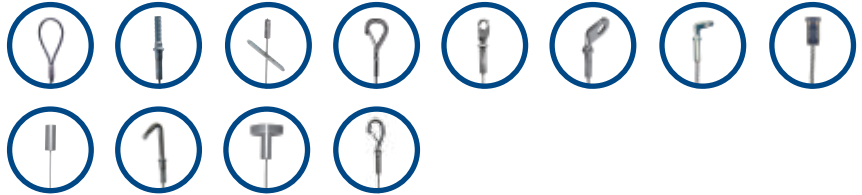

Spiral duct






Mechanical and electrical



Suspended ceilings


Product codes

End fixing	Size	Length (ft)	No.1 (25 lbs)	No.2 (100 lbs)	No.3 (200 lbs)	No.4 (495 lbs)	No.5 (715 lbs)
 Loop		5	HF1-LG-5FT	HF2-LG-5FT	HF3-LG-5FT	HF4-LG-5FT	HF5-LG-5FT
		10	HF1-LG-10FT	HF2-LG-10FT	HF3-LG-10FT	HF4-LG-10FT	HF5-LG-10FT
		15	HF1-LG-15FT	HF2-LG-15FT	HF3-LG-15FT	HF4-LG-15FT	HF5-LG-15FT
		20	HF1-LG-20FT	HF2-LG-20FT	HF3-LG-20FT	HF4-LG-20FT	HF5-LG-20FT
		30	HF1-LG-30FT	HF2-LG-30FT	HF3-LG-30FT	HF4-LG-30FT	HF5-LG-30FT
 Toggle		5	HF1-TG-5FT	HF2-TG-5FT	HF3-TG-5FT	HF4-TG-5FT	
		10	HF1-TG-10FT	HF2-TG-10FT	HF3-TG-10FT	HF4-TG-10FT	
		15	HF1-TG-15FT	HF2-TG-15FT	HF3-TG-15FT	HF4-TG-15FT	
		20	HF1-TG-20FT	HF2-TG-20FT	HF3-TG-20FT	HF4-TG-20FT	
		30	HF1-TG-30FT	HF2-TG-30FT	HF3-TG-30FT	HF4-TG-30FT	
 1/4" Toggle		5		HF2-TQG-5FT			
		10		HF2-TQG-10FT			
		15		HF2-TQG-15FT			
		20		HF2-TQG-20FT			
		30		HF2-TQG-30FT			




Loop

- Ideal for choking around bar joists, strut, purlins, beams, roof trusses and other accessible building features
- Available up to 715 lbs SWL, with a 5:1 safety factor
- Comes as a ready-to-use kit with cable and Gripple fastener
- Available in lengths from 5 - 30 ft
- Other lengths are available on request
- Available in Stainless steel (page 47)

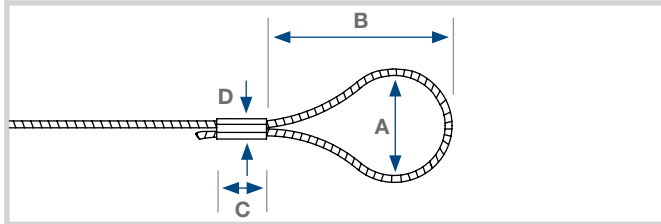

Size	A (~ in)	B (~ in)	C (in)	D (in)
No.1 (25 lbs)	1 3/16"	2 3/8"	3/8"	1/4"
No.2 (100 lbs)	1 3/16"	2 3/8"	1/2"	5/16"
No.3 (200 lbs)	1 3/16"	2 3/8"	5/8"	3/8"
No.4 (495 lbs)	1 3/4"	3 1/4"	1"	5/8"
No.5 (715 lbs)	1 3/4"	3 1/2"	1 3/16"	3/4"

Install end fixings in accordance with manufacturers' specifications.

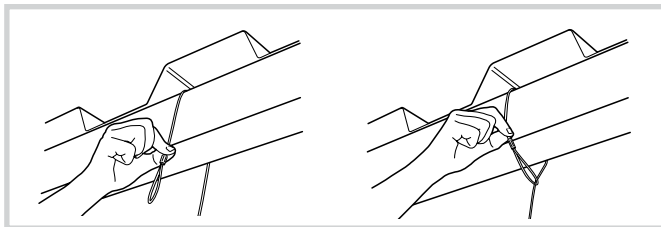

Related products



Page 45



Page 66



Page 67




Page 69




Stud

- Ideal for anchoring into concrete structures, metal decking, metal brackets using nuts, and clamps and clevis hangers.
- 1/4" and 3/8" sizes available
- Available up to 495 lbs SWL, with a 5:1 safety factor
- Comes as a ready-to-use kit with cable and Gripple fastener
- Available in cable lengths from 5 - 30 ft
- Other lengths are available on request
- Available in Stainless steel (page 47)

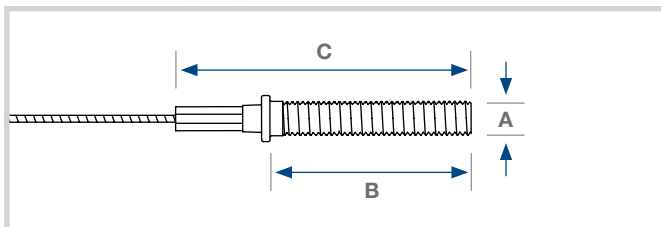

Size	A (in)	B (in)	C (in)
No.1 (25 lbs)	1/4"	1"	2"
No.2 (100 lbs)	1/4"	1"	2"
	1/4"	2"	4"
No.3 (200 lbs)	1/4"	1"	2"
	3/8"	1 3/4"	3 3/4"
No.4 (495 lbs)	3/8"	1 3/4"	3 3/4"

Install end fixings in accordance with manufacturers' specifications.

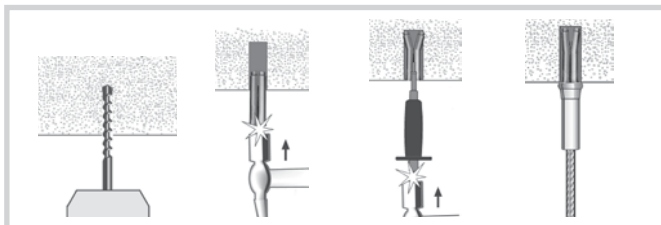

Related products



Page 66



Page 40



Page 46