

FEATURES & SPECIFICATIONS

INTENDED USE — For use with housings L7X, L7XR, and LC6.

CONSTRUCTION — Aluminum one piece reflector.

Polyester powder coat paint.

White finish has integral flange.

Anodized finishes have white polymeric flange ring as standard.

INSTALLATION — Socket to trim interface.

Retaining clips pull and snap onto top of reflector to hold trim inside housing.

LISTING — U.L. Listed to U.S. and Canadian safety standards. Damp location listed.

Pull on clip Patent # (U.S.) 5707143, (Canada) 2193902.

Catalog Number
Notes
Type

6" Finishing Trim

705



OPEN DEEP
Narrow Flange


Specifications

Height: 7-1/4 (18.4)

Lamp opening: 5-7/8 (14.9)

Diameter: 7-5/8 (19.4) *white*,
8 (20.3) *others*

All dimensions are inches (centimeters).

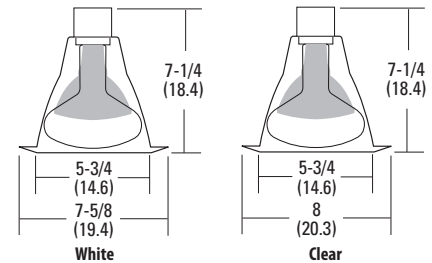

ORDERING INFORMATION

For shortest lead times, configure product using **standard options (shown in bold)**.

Example: 705

705	
Series	Finish
705	(blank) White AZ Clear specular

Housing Compatibility

Housing and trim ordered separately.

Application	Source	Maximum wattage	Housing
Non-IC	Incandescent	150 PAR38	L7X, L7XR, LC6
		120 BR40	L7X, L7XR, LC6

