

Through-type terminal thermoplast Screw terminal on both sides  
Terminal block 3-pole, beige 18mm, Sz. 2.5

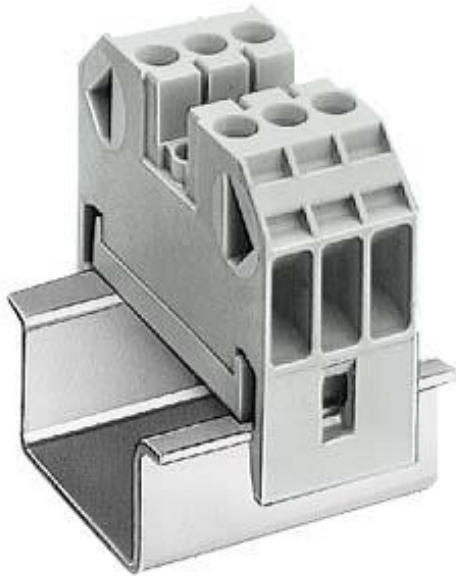


Figure similar

Model	
Product brand name	ALPHA
Product designation	ALPHA FIX terminal blocks
Design of terminal / Terminal levels internally linked	No
General technical data	
Terminal contact spacing	18 mm
Protection class	
Combustibility class acc. to UL 94	V2
Main circuit	
Operating voltage / rated value	800 V
Operating current / rated value	24 A
Appearance	
Color	beige
Product details	
Product component / required / connection plate	No



Number	
Number of terminal levels	1
Number of terminal points / per terminal level	2

Connections	
Connectable conductor cross-section / stranded	
• minimum	2.5 mm <sup>2</sup>
• maximum	2.5 mm <sup>2</sup>
Wire stripping length	11 mm
<b>Connectable conductor cross-section</b>	
• solid	
— minimum	2.5 mm <sup>2</sup>
— maximum	2.5 mm <sup>2</sup>
• finely stranded	
— with core end processing / minimum	2.5 mm <sup>2</sup>
— with core end processing / maximum	2.5 mm <sup>2</sup>
— without core end processing / minimum	2.5 mm <sup>2</sup>
— without core end processing / maximum	2.5 mm <sup>2</sup>
Tightening torque / with screw-type terminals	
• minimum	0.5 N·m
• maximum	0.5 N·m
<b>Type of electrical connection</b>	
• 1	screw-type terminal
• 2	screw-type terminal
Position / of the terminal	lateral

Mechanical Design	
Height / with lowest-profile installation	26 mm
Length	41 mm
Mounting type	DIN rail 35 mm
Net weight	23.1 g
Material / of the insulating body	Thermoplast

Environmental conditions	
Ambient temperature	
• during operation / minimum	-25 °C
• during operation / maximum	55 °C
• during operation	(no derating)

Certificates	
Design tested acc. to type of protection / EEx e	No

General Product Approval	Declaration of Conformity	Test Certificates	Shipping Approval
 CSA	 UR		 EG-Konf.
			<a href="#">Miscellaneous</a>
			 BUREAU VERITAS

Shipping Approval	other
-------------------	-------



[Environmental Confirmations](#)

#### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WA1011-3DF21>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/8WA1011-3DF21>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=8WA1011-3DF21](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WA1011-3DF21)

**CAX-Online-Generator**

<http://www.siemens.com/cax>

**Tender specifications**

<http://www.siemens.com/specifications>