

DESCRIPTION

Designed for sloped ceiling installations for ceilings from 2/12 to 6/12 pitch. The socket aiming mechanism allows the lamp to be aimed straight down regardless of ceiling pitch.

Catalog #	Type
Project	
Comments	
Prepared by	Date

SPECIFICATION FEATURES

A...Baffle

One piece seamless baffle presents a clean finished appearance.

B...Trim Ring

White polycarbonate Trim Ring.

C...Housing

Telescoping housing for ceiling construction down to 2"x 8". With deeper ceilings the housing provides sharper cutoff.

D...Junction Box

Junction box is listed for through branch circuit wiring and has six 1/2" knockouts with true pry-out slots.

E...GOT NAIL! Pass-N-Thru™ Bar Hangers

Bar Hanger Features include:

- Pre-installed nail easily installs in regular lumber, engineered

lumber and laminated beams

- Safety and guidance system prevents snagging, ensures smooth straight nail penetration and allows bar hangers to be easily removed if necessary.
- Automatic levelling flange aligns the housing and lets you hold the housing in place with one hand while driving nails
- Housing can be positioned at any point within 24" joist span
- Score lines allow "toolless" shortening for 12" joists
- Bar hangers do not need to be removed from frame for shortening
- Integral T-bar clips snaps onto T-bars - no additional clips required

F...Socket


Exclusive socket aiming mechanism swivels and rotates to properly align lamp. Slope indicator provides quick and consistent lamp settings (factory set for 3/12 slope).

G...Integral Thermal Protector

Thermal protector guards against misuse of insulation materials.

Labels


U.L. damp location, U.L. Feed Through, CSA Certified, IP rated.




H47T

5 0 W 1 2 V M R 1 6
 7 5 W R 3 0
 9 0 W P A R 3 8
 1 0 0 W R 3 0
 7 5 , 1 0 0 W A 1 9
 1 5 0 W A 2 1

6" RECESSED
 INCANDESCENT
 DOWNLIGHT

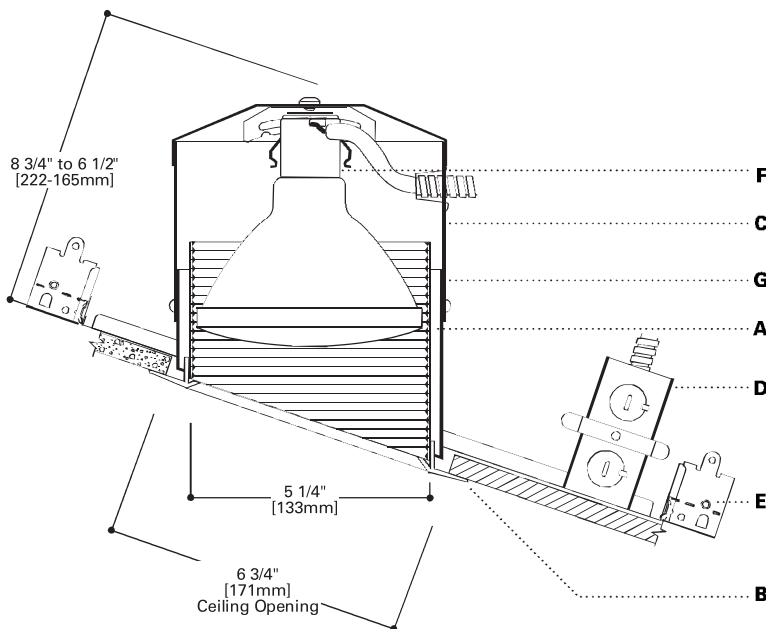

Top View



TRIMS

ORDERING INFORMATION


SAMPLE NUMBER: H47T498P

Complete unit consists of housing and trim.

Housing

H47TH47T= 6" Non IC Slope
Ceiling Housing

Trims

**BAFFLES****Coilex Baffle**
90W PAR38
498P=Black
498W=White
OD: 7 7/8" (200mm)**Coilex Baffle with Reflector**
100W A19, 150W A21
496P=Black
496W=White
OD: 7 7/8" (200mm)**ADJUSTABLES****Coilex Baffle Eyeball**
75W R30
417P=Black
417PB=Polished Brass
417W=White
OD: 8" (203mm)**Eyeball-30° Tilt**
100W R30
78P=Satin White
78B=Brass
78PB=Polished Brass
78PAT=White Air-Tite
OD: 8" (203mm)**Baffle Eyeball**
50W 12V MR16
1417P=Black Baffle, White Eyeball, White Trim Ring
1417W=White Baffle, White Eyeball, White Trim Ring
OD: 8" (203mm)

Note: Specifications and Dimensions subject to change without notice.

Visit our web site at www.cooperlighting.com