

DESCRIPTION

Rectilinear surface lighting in a square shape. Available in two lamp types; Incandescent and Compact Fluorescent.

Stunning simple lines mask the inner refinement of ETCHINGS Surface lighting. Use them in lobbies, reception areas, elevator pads, hallways and corridors. Other shapes include Portrait Rectangle, Landscape Rectangle, Ultra Landscape Rectangle, Large and Small Circular.

SPECIFICATION FEATURES

A...Light Diffuser

Etched rectangular grid glass available in a variety of shapes.

B...Brackets

Heavy gauge die formed steel matte chrome finished brackets

hold lamp shield securely, yet allow easy relamping.

C...Lampholder Housing





Solid steel mounting plate, with chrome finish. All necessary hardware included.

D...Glass Shield

Glass shield supplied for use with T-4 quartz lamps.

Listings

UL listed and CSA certified. Meets all ADA requirements with no more than 4" depth.

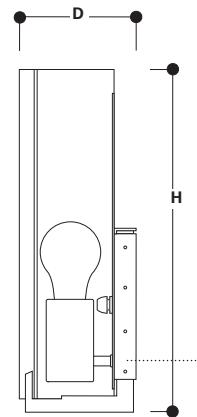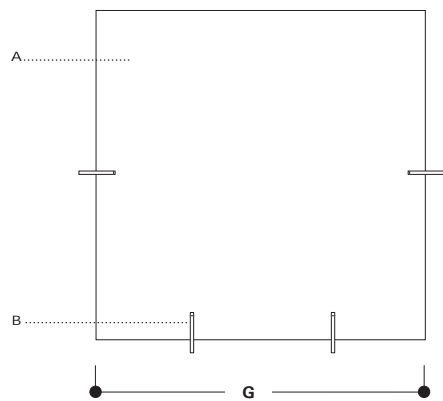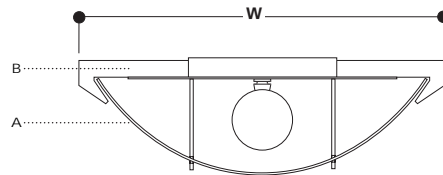

H2522 and H2523 Squares

ETCHINGS
SQUARE
WALL SCONCES

Surface Mount

Score Energy Data H2523

Lamp(s)	(2) 18W quad 4-pin
Ballast Type:	Electronic
120V Input Watts:	37
Line Amps:	0.32
Power Factor:	>.99
THD:	<10% (15°F)
Sound Rating:	A

ORDERING INFORMATION

SAMPLE NUMBER: H2522

Lampholders

H2522=Incandescent
H2523=Compact Fluorescent

Finish

MC=Etched grid glass with
matte chrome brackets



H2522

For use with:
100W BT-15 (quartz) or 100W A19
incandescent (E-270) medium base

W=13 9/16" [344mm]
G=12 1/4" [311mm]
H=12 9/16" [319mm]
D=4" [102mm]

Replacement Glass= G-2522

H2523

For use with:
(2)18W PL-C 4-pin compact fluorescent.
Electronic ballast—universal input voltage:
120-277VAC 50/60 Hz

W=13 9/16" [344mm]
G=12 1/4" [311mm]
H=12 9/16" [319mm]
D=4" [102mm]

Replacement Glass= G-2522

ADV990088

9/04
TAB: SURFACE LUMINAIRES
Sheet 9

Note: Specifications and Dimensions subject to change without notice.

Visit our web site at www.cooperlighting.com

