




# Metallics

An **AMERICAN** Source For Premier  
and Innovative Fasteners and Anchors

## WEDGE ANCHOR

The following Specification Sheet applies to all Wedge Anchors in our **TS and JTS** series.

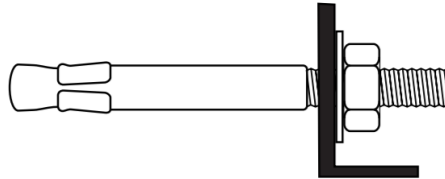

WEDGE ANCHORS					
W x L	Minimum Embedment (inches)	Fastens Material Up To	Thread Length	Average Ultimate Tensile & Shear Values	
Anchor Size				4000 psi concrete	2000 psi concrete
				Tensile	Shear
1/4-20 x 1-3/4	1	3/8	7/8	1500	900
1/4-20 x 2-1/4		7/8	1-1/4		
1/4-20 x 3-1/4		1-7/8	2-1/4		
5/16-18 x 2-3/4	1-1/4	1-1/8	1-3/4	1900	2700
3/8-16 x 2-1/4	1-1/2	3/8	1-1/2	3600	4100
3/8-16 x 2-3/4		7/8	1-3/4		
3/8-16 x 3		1-1/8	3		
3/8-16 x 3-1/2		1-5/8	2-7/8		
3/8-16 x 3-3/4		1-7/8	2-3/4		
3/8-16 x 5		3-1/8	2-3/4		
3/8-16 x 6-1/2		4-5/8	2-1/8		
1/2-13 x 2-3/4	2	1/4	1-1/2	4800	6400
1/2-13 x 3-3/4		1/4	2-1/4		
1/2-13 x 4-1/4		1-1/2	1-1/4		
1/2-13 x 5-1/2		3	2-3/4		
1/2-13 x 7		4-1/2	2-3/8		
1/2-13 x 8-1/2		6	2-1/2		
5/8-11 x 3-1/2	2-1/2	3/8	1-7/8	6500	9400
5/8-11 x 4-1/2		1-3/8	2-7/8		
5/8-11 x 5		1-7/8	3-3/8		
5/8-11 x 6		2-7/8	4-3/8		
5/8-11 x 8-1/2		5-3/8	1-5/8		

### Metallics

229 Cross Street  
Bristol, CT 06010

[www.metallics.us](http://www.metallics.us)

Phone: 860 589-4186 Toll Free: 800 243-8272

Fax: 860 584-1008 Toll Free Fax: 800 831-9358



# Metallics

An **AMERICAN** Source For Premier  
and Innovative Fasteners and Anchors

WEDGE ANCHORS					
W x L	Minimum Embedment (inches)	Fastens Material Up To	Thread Length	Average Ultimate Tensile & Shear Values	
Anchor Size				4000 psi concrete	2000 psi concrete
				Tensile	Shear
3/4-10 x 4-1/4	3	1/2	2-1/2	7200	14,800
3/4-10 x 4-3/4		1	2-1/8		
3/4-10 x 5-1/2		1-3/4	2-3/4		
3/4-10 x 6-1/4		2-1/2	3		
1-8 x 9	4	4	2-1/4	13,700	27,300

<b>Description</b>	A four-piece assembly consisting of (1) an anchor bolt threaded at one end with a unified pitch, and a shoulder at the opposite end which retains a free-spinning clip, (2) a clip with three lateral slits and projections designed to exert greater holding power the greater the load that is applied, (3) a hex nut, and (4) a flat washer.	
<b>Applications/ Advantages</b>	These are heavy-duty, non-bottom bearing anchors of greater shear strength than other light and medium-duty expansion anchors. The design of the expansion clip assures full contact with the masonry. Wedge anchors withstand temperature fluctuations well. For best performance, minimum anchor spacing should be 10 hole diameters and minimum edge distance be 5 hole diameters.	
<b>Material</b>	<i>Carbon Steel</i>	<i>Type 304 Stainless</i>
	<b>Anchor Body:</b> AISI 1018 - 12L14 or equivalent free-machining carbon steel <b>Expansion Wedge:</b> AISI C1008 - 1010 or equivalent carbon steel <b>Nut:</b> ASTM A-563 Grade-A carbon steel <b>Washer:</b> Carbon steel	<b>Anchor Body:</b> Type 304Cu (1/4" thru 3/4" diameters) Type 304 (7/8 thru 1-1/4" diams & all lengths over 7") <b>Expansion Wedge:</b> Type 304 stainless <b>Nut:</b> 18-8 stainless <b>Washer:</b> 18-8 stainless
<b>Ultimate Shear Strength</b>	See average test values as listed in above table. <b>Important:</b> The maximum working loads should not exceed 1/4 of the average ultimate values for a specific size.	

## Metallics

229 Cross Street  
Bristol, CT 06010

[www.metallics.us](http://www.metallics.us)

Phone: 860 589-4186 Toll Free: 800 243-8272

Fax: 860 584-1008 Toll Free Fax: 800 831-9358