




## PRODUCT DATA SHEET

Sta-Plex™ Extreme Pressure Premium Red Grease, 14 Wt Oz  
 No. SL3190 | Item# 1007890 | Case# 1007889

Product Description	A superior multi-purpose certified lithium complex based NLGI #2 grease. Contains extreme pressure, anti-wear, & anti-oxidation additives. Ideal for high temperature & performance applications. Drop point 500°F
Applications	Ind. mining, metal production, machining, plastic molding, pumps, electric motors, ball & roller bearings, kilns, assembly plants, drying ovens, trucks, automobiles, buses, construction equipment, off-road operations, tractors mowers, reapers, water pumps
Unit Package Description	14 Ounce Cartridge
Brand	Sta-Lube
Generic Description 1	Premium Red Grease
Net Fill	14 Wt Oz
UPC Code	072213319002
Unit Dimensions	9.31H x 2.13W x 2.13D in
Units Per Case	10
Case Dimensions	9.5H x 4.5W x 11.38D in
Cases Per Pallet	150
Case Weight	10 lbs
I 2 of 5 Code	30072213319003
Appearance	Red Semi-Solid to Solid Grease
Base Type	Lithium Complex
Flash point (F)	475°F
Flash point (C)	246°C
Flammability Class - CPSC	None
Spec Gravity Concentrate	0.9 at 60°F
NLGI Grade	2
Timken OK Load Lbs.	60 Lbs Min
Plastic Safe	Not Determined
Evaporation Rate	<1 (butyl acetate=1)

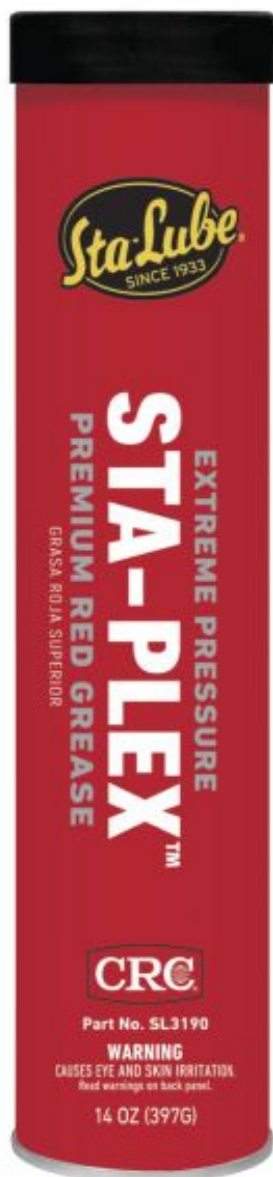

Last revised: 2/20/2018  
 Page 1 of 2



Customer Care: 800-556-5074  
 Technical Assistance: 800-521-3168  
[www.crcindustries.com](http://www.crcindustries.com)

CRC Industries is a worldwide leader in the production of specialty chemicals for maintenance and repair professionals serving industrial, electrical, aviation, automotive and marine markets. CRC is ISO 9001:2008 certified and adheres to the strictest guidelines for quality in all facets of research, development and production.




CRC®, K&W®, Sta-Lube®, Marykate® and products denoted with ® and ™ are trademarks of CRC Industries, Inc.



## PRODUCT DATA SHEET

Working Temp (F)	-20 to 325°F
Working Temp (C)	-27 to 162°C
4 Ball EP	77 LWI, 500 Kg Weld
4 Ball Wear	0.4 typical; 0.6 Max
Drop Point	500+ °F
Elastomer Compatibility	0 to 30% vol; 0 to 15 hard
Leakage	10g Max
Low Temp Torque	15.5 Max
Oil Separation	<5
Oxidation Stability	5
Pour Point (F)	5°F
Pour Point (C)	-15°C
ISO Viscosity Grade	230
Water Washout	<5
Worked Penetration	265 to 295
Propellant	None
NSF Category Code	H2
NSF Number	145511
DOT Proper Shipping Name	Not Regulated
VOC % (Consumer Product def)	1
VOC g/L (Consumer Product def)	9
VOC lbs/gal (Consumer Prod def)	0.075
VOC Category	Not Regulated
Removal (How To)	Remove with a degreaser or brake cleaner product.

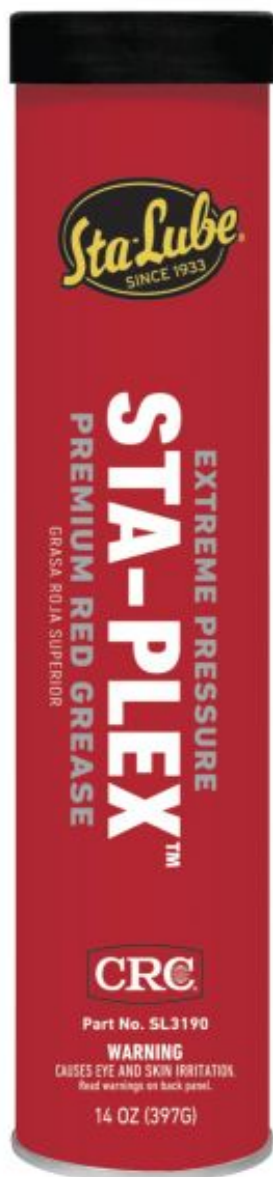

Last revised: 2/20/2018  
Page 2 of 2



Customer Care: 800-556-5074  
Technical Assistance: 800-521-3168  
www.crcindustries.com



CRC®, K&W®, Sta-Lube®, Marykate® and products denoted with ® and ™ are trademarks of CRC Industries, Inc.

CRC Industries is a worldwide leader in the production of specialty chemicals for maintenance and repair professionals serving industrial, electrical, aviation, automotive and marine markets. CRC is ISO 9001:2008 certified and adheres to the strictest guidelines for quality in all facets of research, development and production.