



Figure similar

CONTACTOR, 400A/AC-1 AC(40...60HZ)/DC OPERATION UC 110-127V AUXILIARY CONTACTS 2NO+2NC 3-POLE, SIZE S10 BAR CONNECTIONS CONVENT. OPERATING MECHANISM

product brand name	SIRIUS
Product designation	power contactor
General technical data:	
Size of contactor	S10
Insulation voltage	
• Rated value	1 000 V
Surge voltage resistance Rated value	8 kV
Protection class IP	
• on the front	IP00
• of the terminal	IP00
Degree of pollution	3
Mechanical service life (switching cycles)	
• of the contactor typical	10 000 000
• of the contactor with added electronics-compatible auxiliary switch block typical	5 000 000
• of the contactor with added auxiliary switch block typical	10 000 000
Ambient conditions:	
Installation altitude at height above sea level maximum	2 000 m
Ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-55 ... +80 °C
Main circuit:	
Number of NO contacts for main contacts	3

Number of NC contacts for main contacts	0
Operating current	
<ul style="list-style-type: none"> • at AC-1 at 400 V <ul style="list-style-type: none"> — at ambient temperature 40 °C Rated value 	400 A
<ul style="list-style-type: none"> • at AC-1 up to 690 V <ul style="list-style-type: none"> — at ambient temperature 40 °C Rated value — at ambient temperature 60 °C Rated value 	400 A 380 A
<ul style="list-style-type: none"> • at AC-3 <ul style="list-style-type: none"> — at 400 V Rated value — at 690 V Rated value 	138 A 138 A
Connectable conductor cross-section in main circuit at AC-1	
<ul style="list-style-type: none"> • at 60 °C minimum permissible 	185 mm ²
<ul style="list-style-type: none"> • at 40 °C minimum permissible 	185 mm ²
Operating current	
<ul style="list-style-type: none"> • with 1 current path at DC-1 <ul style="list-style-type: none"> — at 24 V Rated value — at 110 V Rated value 	380 A 33 A
<ul style="list-style-type: none"> • with 2 current paths in series at DC-1 <ul style="list-style-type: none"> — at 24 V Rated value — at 110 V Rated value 	380 A 380 A
<ul style="list-style-type: none"> • with 3 current paths in series at DC-1 <ul style="list-style-type: none"> — at 24 V Rated value — at 110 V Rated value 	380 A 380 A
Operating current	
<ul style="list-style-type: none"> • with 1 current path at DC-3 at DC-5 <ul style="list-style-type: none"> — at 24 V Rated value — at 110 V Rated value 	380 A 3 A
<ul style="list-style-type: none"> • with 2 current paths in series at DC-3 at DC-5 <ul style="list-style-type: none"> — at 110 V Rated value — at 24 V Rated value 	380 A 380 A
<ul style="list-style-type: none"> • with 3 current paths in series at DC-3 at DC-5 <ul style="list-style-type: none"> — at 110 V Rated value — at 24 V Rated value 	380 A 380 A
Operating power	
<ul style="list-style-type: none"> • at AC-1 <ul style="list-style-type: none"> — at 230 V at 60 °C Rated value — at 400 V Rated value — at 690 V Rated value — at 690 V at 60 °C Rated value 	145 kW 250 kW 430 kW 430 kW
<ul style="list-style-type: none"> • at AC-2 at 400 V Rated value 	75 kW
<ul style="list-style-type: none"> • at AC-3 	

— at 230 V Rated value	97 kW
— at 400 V Rated value	75 kW
— at 500 V Rated value	90 kW
— at 690 V Rated value	132 kW
Thermal short-time current restricted to 10 s	2 400 A
Active power loss at AC-3 at 400 V for rated value of the operating current per conductor	27 W
No-load switching frequency	
• at AC	2 000 1/h
• at DC	2 000 1/h
Operating frequency	
• at AC-1 maximum	750 1/h

Control circuit/ Control:	
Type of voltage of the control supply voltage	AC/DC
Control supply voltage at AC	
• at 50 Hz Rated value	110 ... 127 V
• at 60 Hz Rated value	110 ... 127 V
Control supply voltage at DC	
• Rated value	110 ... 127 V
• Rated value	40 Hz
Control supply voltage frequency 2 Rated value	60 Hz
Operating range factor control supply voltage rated value of the magnet coil at AC	
• at 50 Hz	0.8 ... 1.1
• at 60 Hz	0.8 ... 1.1
Operating range factor control supply voltage rated value of the magnet coil at DC	0.8 ... 1.1
Design of the surge suppressor	with varistor
Apparent pick-up power of the magnet coil at AC	590 V·A
Inductive power factor with closing power of the coil	0.9
Apparent holding power of the magnet coil at AC	6.7 V·A
Inductive power factor with the holding power of the coil	0.9
Closing power of the magnet coil at DC	650 W
Holding power of the magnet coil for DC	7.4 W
Closing delay	
• at AC	30 ... 95 ms
• at DC	30 ... 95 ms
Opening delay	
• at AC	40 ... 80 ms
• at DC	40 ... 80 ms
Arcing time	10 ... 15 ms

Auxiliary circuit:

Number of NC contacts <ul style="list-style-type: none">• for auxiliary contacts<ul style="list-style-type: none">— instantaneous contact	2
Number of NO contacts <ul style="list-style-type: none">• for auxiliary contacts<ul style="list-style-type: none">— instantaneous contact	2
Operating current at AC-12 maximum	10 A
Operating current at AC-15 <ul style="list-style-type: none">• at 230 V Rated value• at 400 V Rated value	6 A 3 A
Operating current at DC-12 <ul style="list-style-type: none">• at 60 V Rated value• at 110 V Rated value• at 220 V Rated value	6 A 3 A 1 A
Operating current at DC-13 <ul style="list-style-type: none">• at 24 V Rated value• at 60 V Rated value• at 110 V Rated value• at 220 V Rated value	10 A 2 A 1 A 0.3 A

UL/CSA ratings:

Contact rating of the auxiliary contacts acc. to UL	A600 / Q600
--	-------------

Short-circuit:

Design of the fuse link <ul style="list-style-type: none">• for short-circuit protection of the main circuit<ul style="list-style-type: none">— with type of assignment 1 required— with type of assignment 2 required• for short-circuit protection of the auxiliary switch required	fuse gL/gG: 500 A fuse gL/gG: 500 A fuse gL/gG: 10 A
--	--

Installation/ mounting/ dimensions:

Mounting type <ul style="list-style-type: none">• Side-by-side mounting	screw fixing Yes
Height	210 mm
Width	145 mm
Depth	202 mm
Required spacing <ul style="list-style-type: none">• for grounded parts<ul style="list-style-type: none">— at the side	10 mm

Connections/ Terminals:

Type of electrical connection	
--------------------------------------	--

<ul style="list-style-type: none"> • for main current circuit • for auxiliary and control current circuit 	screw-type terminals screw-type terminals
Type of connectable conductor cross-section <ul style="list-style-type: none"> • for AWG conductors for main contacts 	2/0 ... 500 kcmil
Type of connectable conductor cross-section <ul style="list-style-type: none"> • for auxiliary contacts <ul style="list-style-type: none"> — solid — finely stranded with core end processing • for AWG conductors for auxiliary contacts 	2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²), max. 2x (0.75 ... 4 mm ²) 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²) 2x (20 ... 16), 2x (18 ... 14), 1x 12

Certificates/ approvals:

General Product Approval	Functional Safety/Safety of Machinery	Declaration of Conformity
---------------------------------	--	----------------------------------



[Baumusterbescheinigung](#)



Test Certificates	Shipping Approval	other
--------------------------	--------------------------	--------------

[spezielle Prüfbescheinigung](#)
[n](#)



[sonstig](#)

other

[Bestätigungen](#) [Umweltbestätigung](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT14666AF36>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT14666AF36>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT14666AF36&lang=en

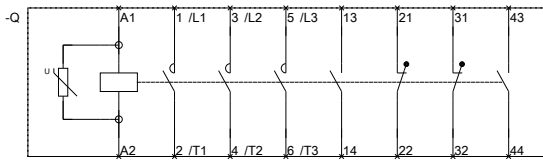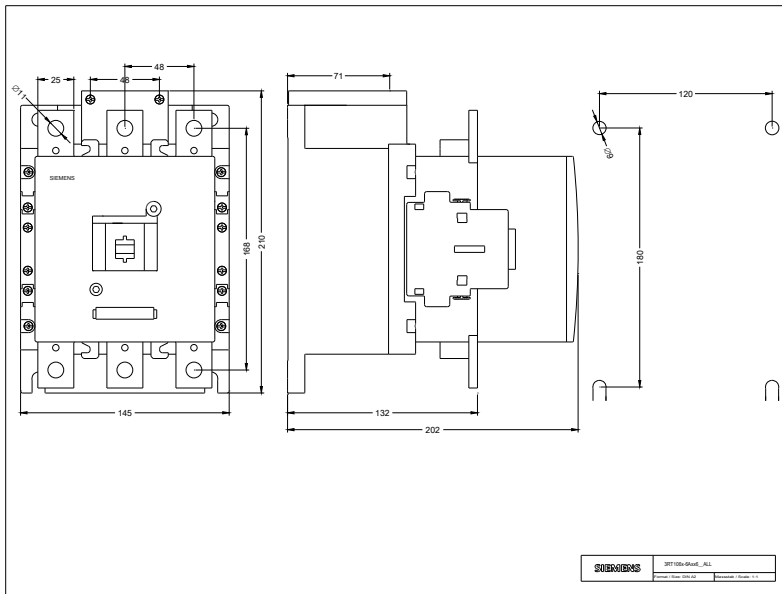

last modified:

29.06.2015

3RT106--A.6_01_4_IEC.DXF
3RT107--A.6_01_4_IEC.DXF